

28GHz and 40GHz Surface Mount Diplexer ADP09388

www.knowlescapacitors.com

DESCRIPTION

This is DLI's surface mountable catalog diplexer designed for the 5G FR2 bands. The two filters are centered at 28GHz and 39GHz. This diplexer utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature. This diplexer is built using thin film technology which offers a drop in solution with highly repeatable performance.



FEATURES

- Small Size
- Integrated 3-Sided Stainless Steel Cover
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

SPECIFICATIONS*

	Parameter	Frequency Range (GHz)	Min	Typ.	Max
Filter 1 LOW BAND	Insertion Loss (dB)	26.5 - 29.5			4.5
	Return Loss (dB)	26.5 - 29.5	10		
	Low Side Rejection (dB)	DC - 23.5	35		
	High Side Rejection (dB)	32.0 - 43.0	35		
Filter 2 HIGH BAND	Insertion Loss (dB)	37.0 - 40.0			4.5
	Return Loss (dB)	37.0 - 40.0	10		
	Low Side Rejection (dB)	DC - 33.0	40		
	High Side Rejection (dB)	44.0 - 55.0	25		
Isolation (dB)		26.5 - 29.5 37.0 - 40.0	30		
Input Power (W)		TBD			
Size (L x W x H)		0.335 x 0.180 x 0.070 in 8.51 x 4.58 x 1.78 mm			

*Electrical specifications based on typical probed performance at room temperature.
Insertion loss shall vary ± 0.5 dB over temperature.

Information in this document is for informational and guideline purposes only. All information regarding the Product described in this datasheet is subject to change from time to time at Knowles Precision Devices' sole discretion. It is the customer's sole responsibility to evaluate the suitability of the Product in the customer's particular application. Knowles Precision Devices assumes no responsibility or liability for the use of the information contained within.

2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLIengineering@knowles.com

28GHz and 40GHz Surface Mount Diplexer








ADP09388

www.knowlesc capacitors.com

Typical Measured Performance

FILTER 1 (LOW BAND)

FILTER 2 (HIGH BAND)

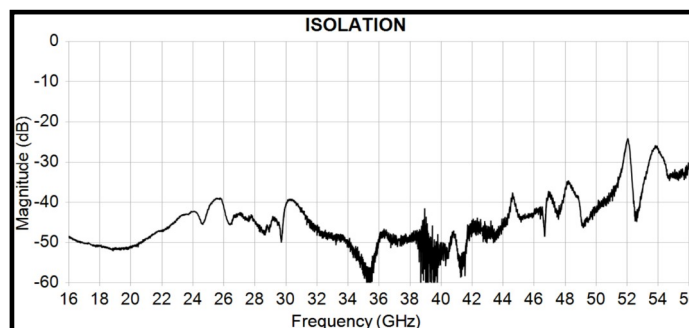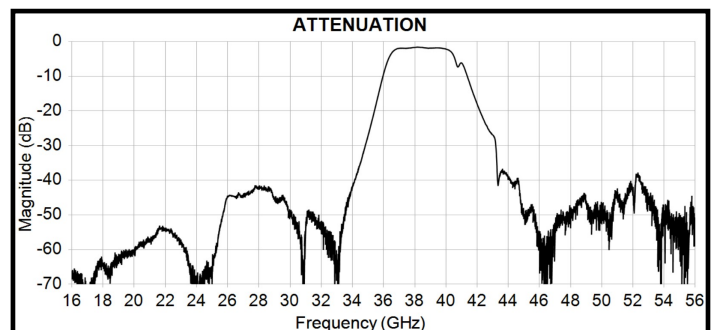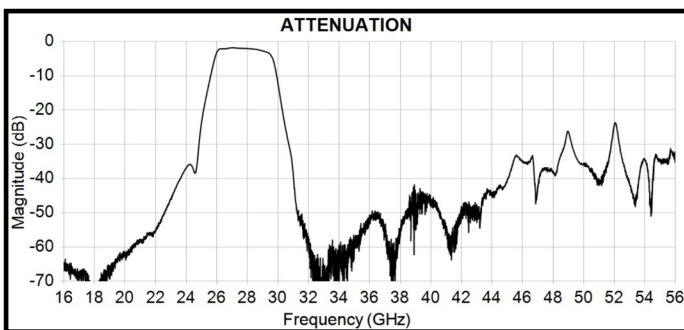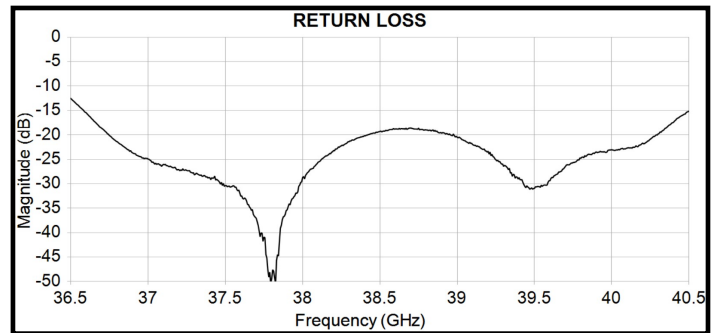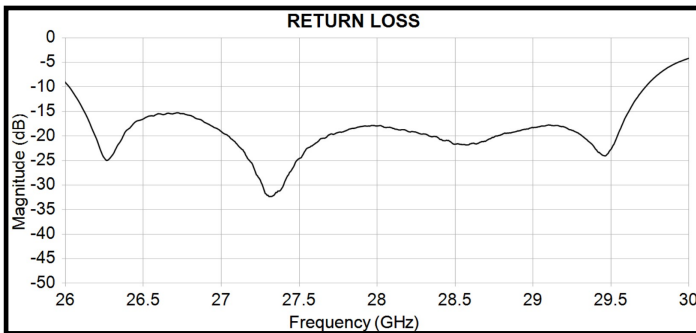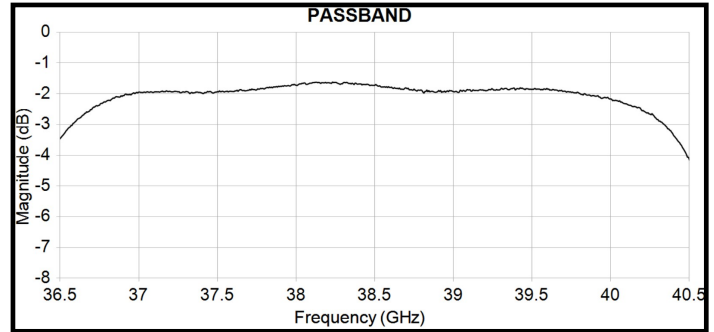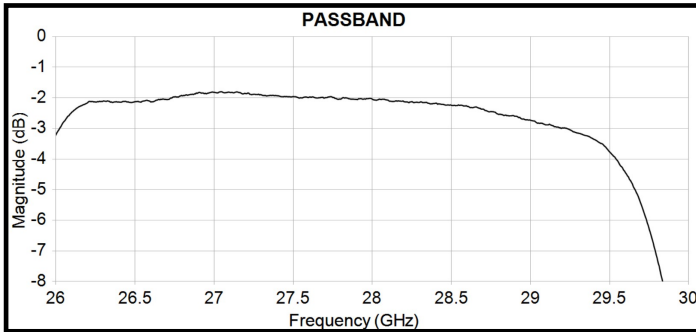


2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLengineering@knowles.com

28GHz and 40GHz Surface Mount Diplexer
ADP09388

Physical Dimensions

Units = inches (in)

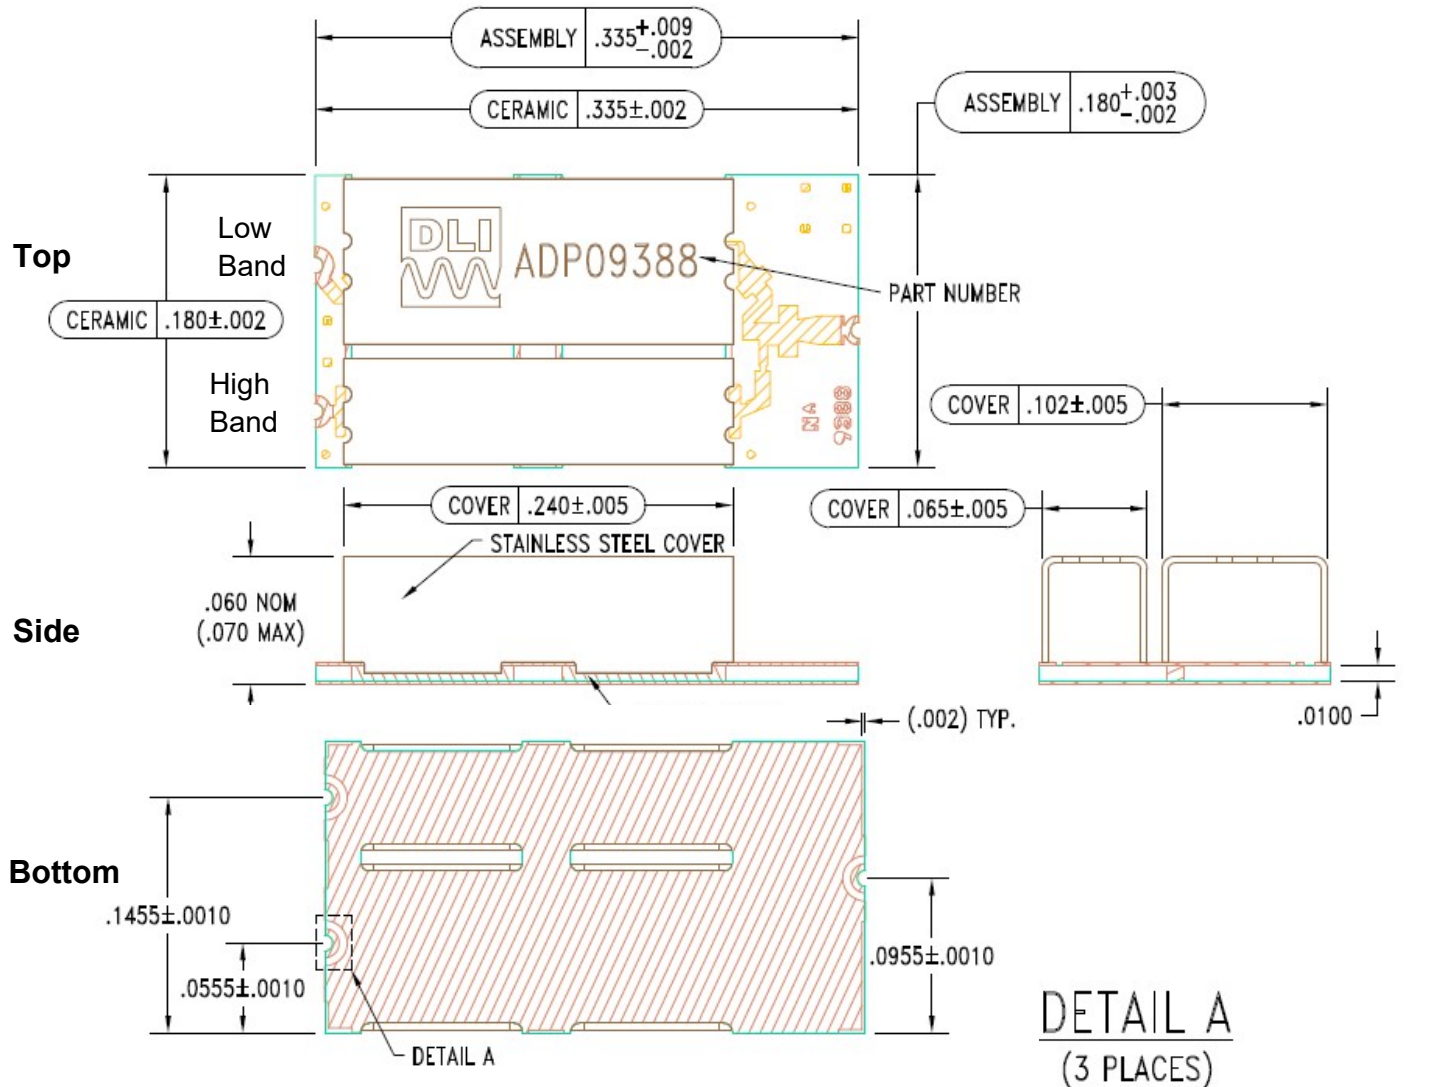

Notes :

1. Termination Finish:

ENIG: 3 - 6 μinch Au over 50 μinch Ni

2. Maximum Assembly Process Temperature: 250°C



2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710


To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLIengineering@knowles.com

Recommended PCB Layout

unit = in [mm]

- 50Ω trace dimensions are application specific
- Ensure adequate grounding beneath the part

-  PWB Ground Via
-  Filter Bottom Metallization
-  PWB Top Metallization

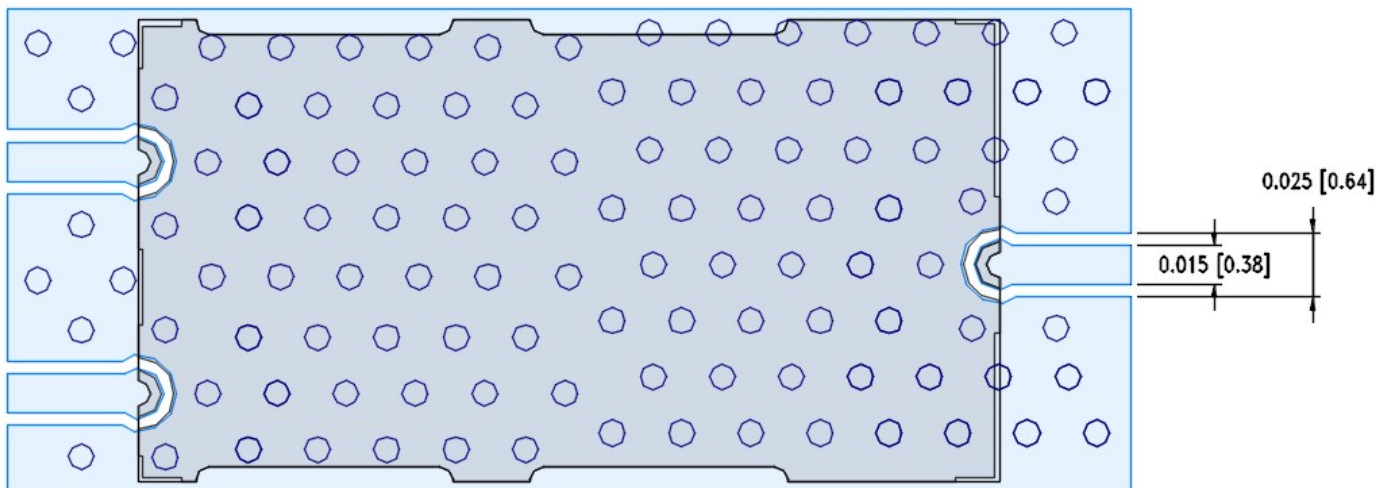

Note:

- 50Ω trace dimensions are application specific.
- 50Ω trace dimensions are designed for 10mil thick R04350B Rogers Board .
 - 15 mils (0.38mm) trace width
 - 5 mils (0.127mm) spacing between the trace and ground

For further details and best practices, reference the **Microwave Products Guide**, available at: <https://www.knowlescapacitors.com/Support/Catalogs>

2777 Route 20 East, Cazenovia, NY 13035| Ph.: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLengineering@knowles.com