


DATE	SYM	REVISION	RECORD	AUTH	DR	CK
5/17/10	A	ADDED NUT & WASHER ON SIDE VIEW			AS	AG

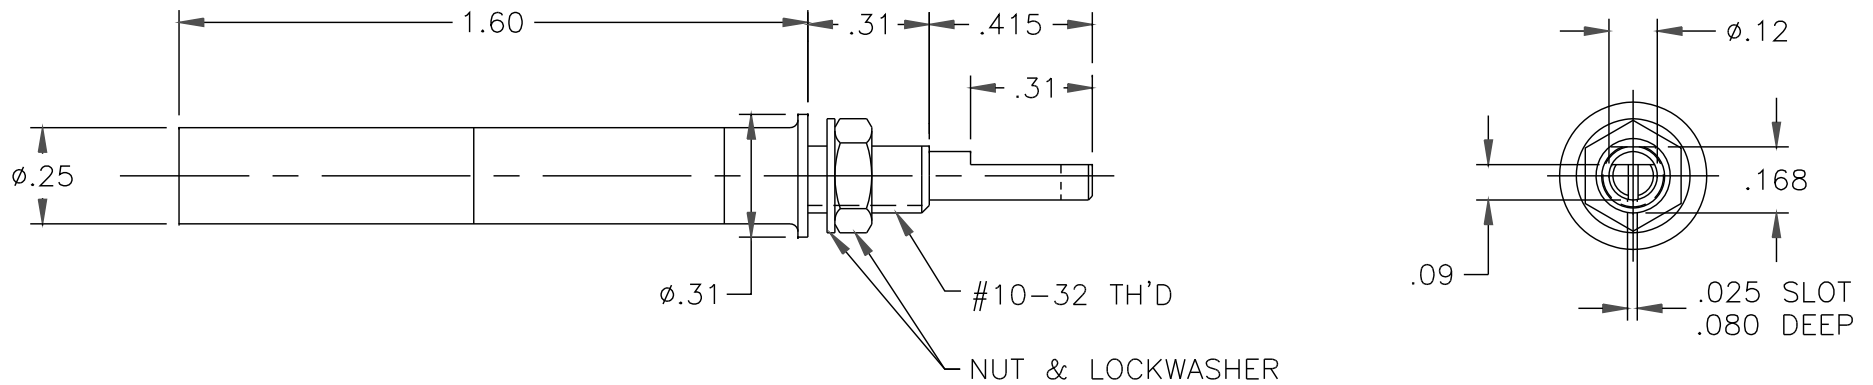

NOTES:

1. CAPACITANCE RANGE, pF: 0.8 TO 38.0
2. DC WORKING VOLTAGE AT 38 pF: 750.
3. DC WITHSTANDING VOLTAGE AT 38 pF: 1500.
4. Q FACTOR AT 25 MHz: 800 MIN.
5. INSULATION RESISTANCE: 10^6 MEGOHMS AT 25°C
6. TUNING TORQUE: 0.5 TO 4.0 IN-OZ
7. OPERATING TEMPERATURE: CRYOGENIC ENVIRONMENT
8. TEMPERATURE COEFFICIENT: ± 50 PPM/°C.

TOLERANCES (EXCEPT AS NOTED)	VOLTRONICS CORPORATION 100 FORD RD. DENVER N.J.		
DECIMAL XXX $\pm.005$ XX $\pm.016$	SCALE 2 : 1	DRAWN BY A.SHTABNAYA	
FRACTIONAL —	TITLE OUTLINE DWG. NMTM38NLFSK	APPROVED BY A.GOLDBERG	
ANGULAR —	DATE 11/24/09	DRAWING NUMBER 70,736	REV.A