

REV.

D



FILE: AIROUT

CAPACITY RANGE	3.0pF TO 55pF (>17 TURNS)	
WORKING VOLTAGE	1000 VDC (TEST VOLT. 2000 VDC)	
Q @ 100 MHz	> 2000	FOR REF ONLY
TEMPERATURE COEFFICIENT @ 75% MAX C	0 ± 100 PPM/°C	
INSULATION RESISTANCE	> 10 ⁶ MEGOHMS	
TEMPERATURE RANGE	-65°C TO +125°C	
TUNING TORQUE	1.0 TO 8.0 OZ. IN	

TUNING TOOL (REF) : JMC P/N 8764

D	9/25/15	CZ	MAI	MAI	001346
C	11/15/12	RJV	RJV 11/29/12	MAI	001113
LEVEL	DATE	DRN.	CHK.	APP.	ECN

DRN. RJV	CHK. RJV	APP. MAI	SCALE 2" = 1"
DATE 7/30/12	DATE 7/30/12	DATE 7/30/12	.XX ± .015 .XXX ± .005

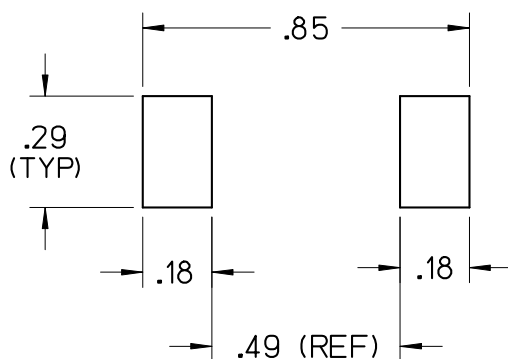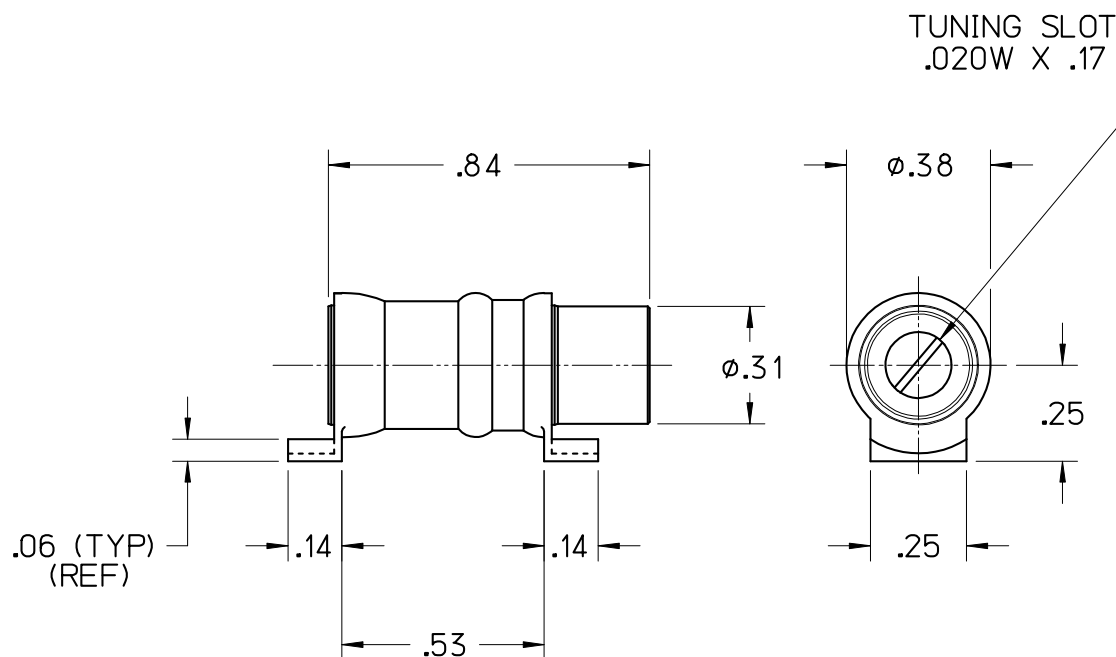

SUGGESTED MOUNTING
PAD PATTERN



ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL