


1585

F

ECO-TRIM™ CAPACITOR

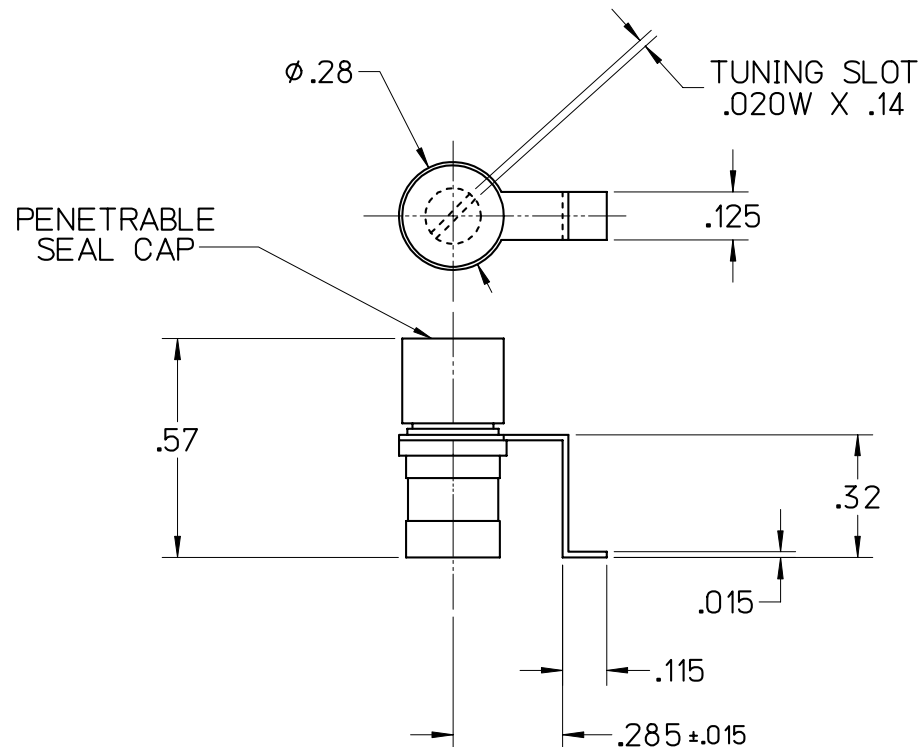

SPECIFICATIONS

FILE: AIROUT

CAPACITY RANGE	1pF TO 10pF (>8 TURNS)
WORKING VOLTAGE	250 VDC (TEST VOLT. 500 VDC)
Q @ 195 MHz	> 4000
INSULATION RESISTANCE	> 10^6 MEGOHMS
TEMPERATURE RANGE	-65°C TO +125°C
TORQUE	1.0 TO 5.0 OZ. IN
COPPER ALLOY & INVAR STRUCTURE	
ALUMINA INSULATION	
GOLD, SILVER, & CHROMATE FINISH	

SUGGESTED MOUNTING PAD PATTERN



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL

F	07/24/06	MLD	MAI	MAI	000393
E	03/15/00	MLD	-	-	000-108
LEVEL	DATE	DRN.	CHK.	APP.	ECN
REVISIONS					
DRN.	MLD	CHK.	TAM	APP.	JHT
DATE	DATE	DATE	DATE	DATE	DATE
03/15/00	03/16/00	03/16/00	03/16/00	03/16/00	03/16/00
SCALE					2" = 1"
					.XX ± .015
					.XXX ± .005