


JMC P/N	CAPACITANCE	Q @ 100 MHz	COLOR CODE
2322-0GSL	0.6 TO 2.5 pF	> 3000	RED
2322-1GSL	1.0 TO 5.0 pF	> 1000	BLUE
2322-2GSL	2.5 TO 10 pF	> 1000	BLACK
2322-3GSL	7.5 TO 18 pF	> 500	CLEAR
2322-4GSL	8.5 TO 25 pF	> 300	GREEN

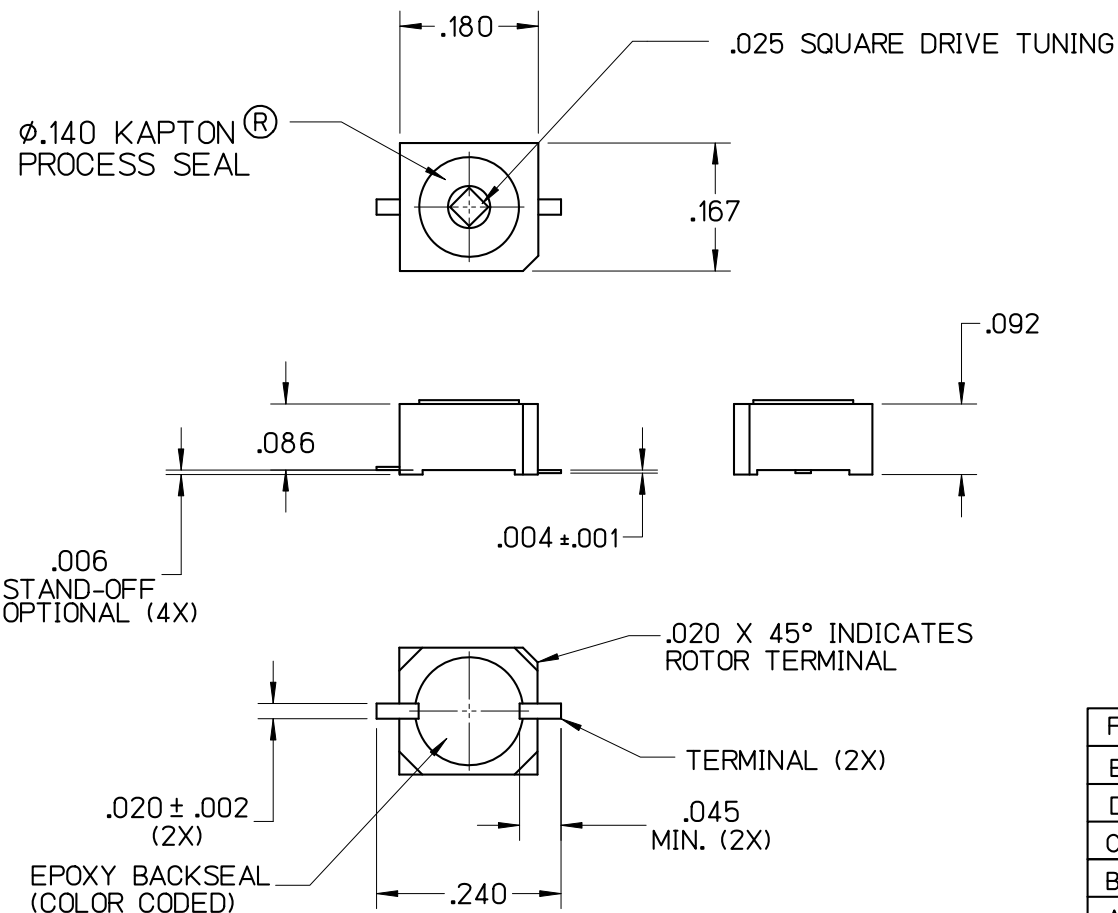

MI DRG. NO.	2322GSLF	REV.
2322GSL		F
CERA-TRIM® CAPACITOR		

SPECIFICATIONS	FILE: THINOUT
CAPACITY RANGE	SEE TABLE
WORKING VOLTAGE	250 VDC (TEST VOLTAGE 500 VDC)
Q @ 100 MHz	SEE TABLE
INSULATION RESISTANCE	> 10 ⁴ MEGOHMS
TEMPERATURE RANGE	-55°C TO +125°C
TORQUE	0.05 TO 1.0 OZ. IN.
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106
SHOCK	100 g @ 6 ms
VIBRATION	15 g @ 10-2000 Hz
SETTING DRIFT	< 1%
CERAMIC DIELECTRIC STRUCTURE	
GOLD FINISH TERMINALS	
RoHS COMPLIANT	

F	01/13/14	SSH	MAI	MAI	001202
E	10/08/10	NK	MAI	MAI	000870
D	10/31/06	MAI	MAI	MAI	000464
C	07/18/06	MLD	MAI	MAI	000416
B	06/26/06	MLD	MAI	MAI	000411
A	02/21/06	MLD	-	-	000361
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
MLD	MAI	MAI	4" = 1"
DATE	DATE	DATE	.XX ± .015
02/21/06	02/21/06	02/21/06	.XXX ± .005



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL