
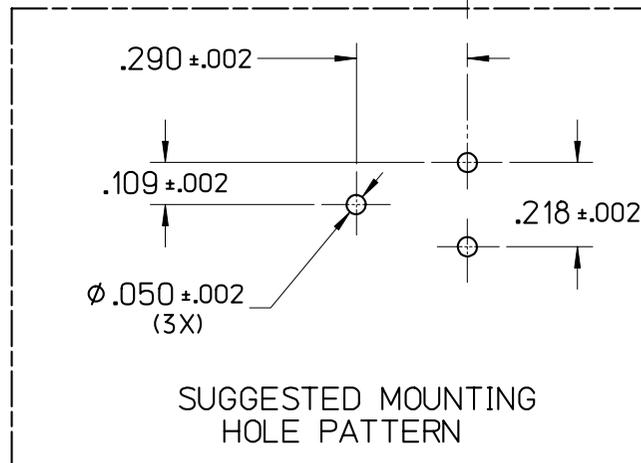


5241

K

AIR TRIMMER CAPACITOR

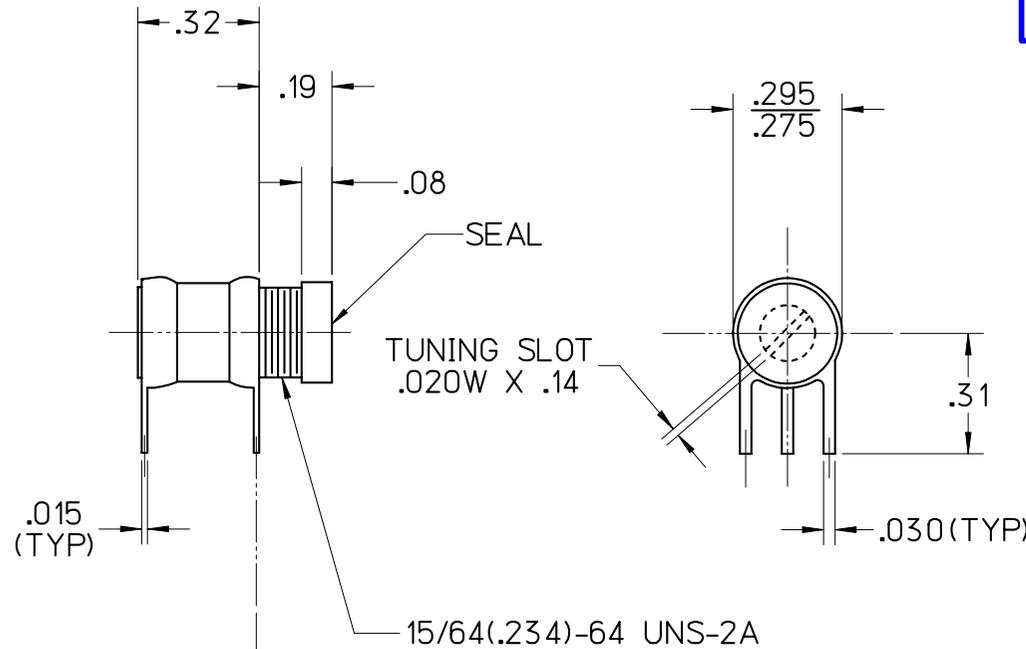

SPECIFICATIONS		FILE: AIROUT
CAPACITY RANGE	0.8pF TO 10pF (>6 TURNS)	
WORKING VOLTAGE	250 VDC (TEST VOLT. 500 VDC)	
Q @ 100 MHz	> 4000	
INSULATION RESISTANCE	>10 ⁶ MEGOHMS	
TEMPERATURE RANGE	-65°C TO +125°C	
T O R Q U E	TUNING	1.0 TO 5.0 OZ. IN
	SEAL ASSEMBLY	8 OZ. IN. MAX
NON-MAGNETIC STRUCTURE		
GLAZED ALUMINA INSULATION		
574°F SOLDER USED IN ASSEMBLY		
SILICONE RUBBER SEAL WASHER		
GOLD, SILVER, & CHROMATE FINISH		

LEVEL	DATE	DRN.	CHK.	APP.	ECN
K	07/27/06	MLD	MAI	MAI	000393
J	03/17/00	MLD	-	-	000-112

REVISIONS

DRN.	CHK.	APP.	SCALE
MLD	TAM	JHT	2" = 1"
DATE	DATE	DATE	.XX ± .015 .XXX ± .005
03/17/00	03/21/00	03/21/00	



JOHANSON MANUFACTURING CORPORATION
 ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION