
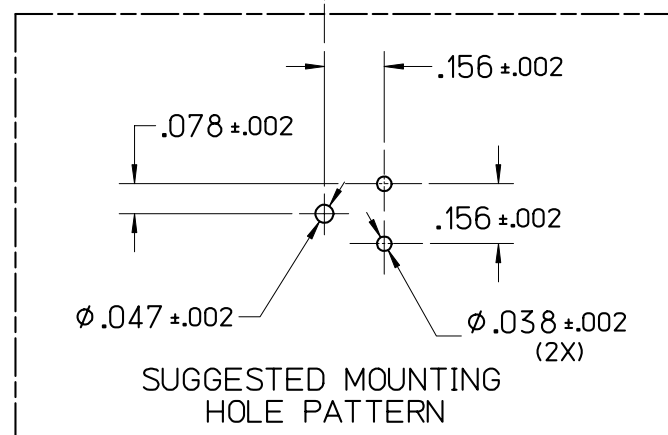
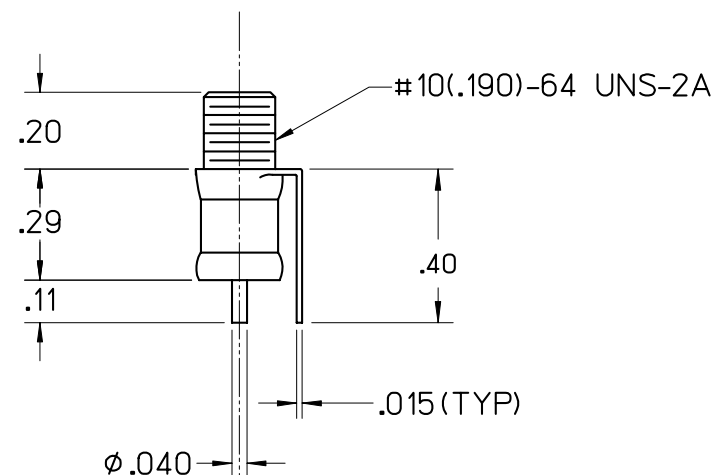


5753

F

AIR TRIMMER CAPACITOR

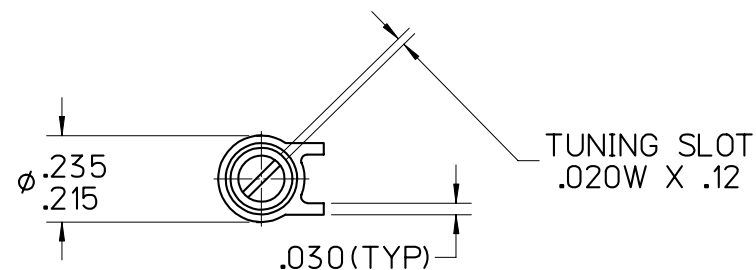

SPECIFICATIONS

FILE: AIROUT

CAPACITY RANGE		1pF TO 10pF (>8 TURNS)
WORKING VOLTAGE		250 VDC (TEST VOLT. 500 VDC)
Q @ 100 MHz		>7500
INSULATION RESISTANCE		>10 ⁶ MEGOHMS
TEMPERATURE RANGE		-65°C TO +125°C
T O R Q U E	TUNING	0.4 TO 4.0 OZ. IN
	NUT MOUNTING	30 OZ. IN. MAX
	SEAL ASSEMBLY	8 OZ. IN. MAX
BRASS & INVAR STRUCTURE		
GLAZED ALUMINA INSULATION		
574°F SOLDER USED IN ASSEMBLY		
GOLD, SILVER, & CHROMATE FINISH		

F	08/01/06	MLD	MAI	MAI	000393
E	11/28/01	MLD	TAM	JHT	010-127
D	03/22/00	MLD	-	-	000-121
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
MLD	TAM	JHT	2" = 1"
DATE	DATE	DATE	.XX ± .015
03/22/00	03/23/00	03/23/00	.XXX ± .005



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION