

DASH NO.	COLOR CODE	CAPACITY RANGE	Q @ 100MHz
9410-0	RED	1.0 TO 4.5	>1000
9410-1	BLACK	2.5 TO 10	>1000
9410-2	BLUE	4.0 TO 18	>700
9410-3	ORANGE	6.0 TO 35	>200
9410-4	BROWN	7.0 TO 40	>200
9410-5	GREEN	8.0 TO 50	>200
9410-7	WHITE	5.0 TO 25	>500

MI DRG. NO.

9410-#Y


REV.

9410 DASH NO.**Y**
THIN-TRIM® CAPACITOR
 (US PATENT NO. 3,701,932)

SPECIFICATIONS

FILE: THINOUT

CAPACITY RANGE	SEE CHART
WORKING VOLTAGE	250 VDC (TEST VOLTAGE 500 VDC)
Q @ 100 MHz	SEE CHART
INSULATION RESISTANCE	> 10 ⁴ MEGOHMS
TEMPERATURE RANGE	-55°C TO +125°C
TORQUE	0.2 TO 2.0 OZ. IN.
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106
SHOCK	100 g @ 6 ms
VIBRATION	15 g @ 10-2000 Hz
CERAMIC DIELECTRIC STRUCTURE	
GOLD FINISH TERMINALS	

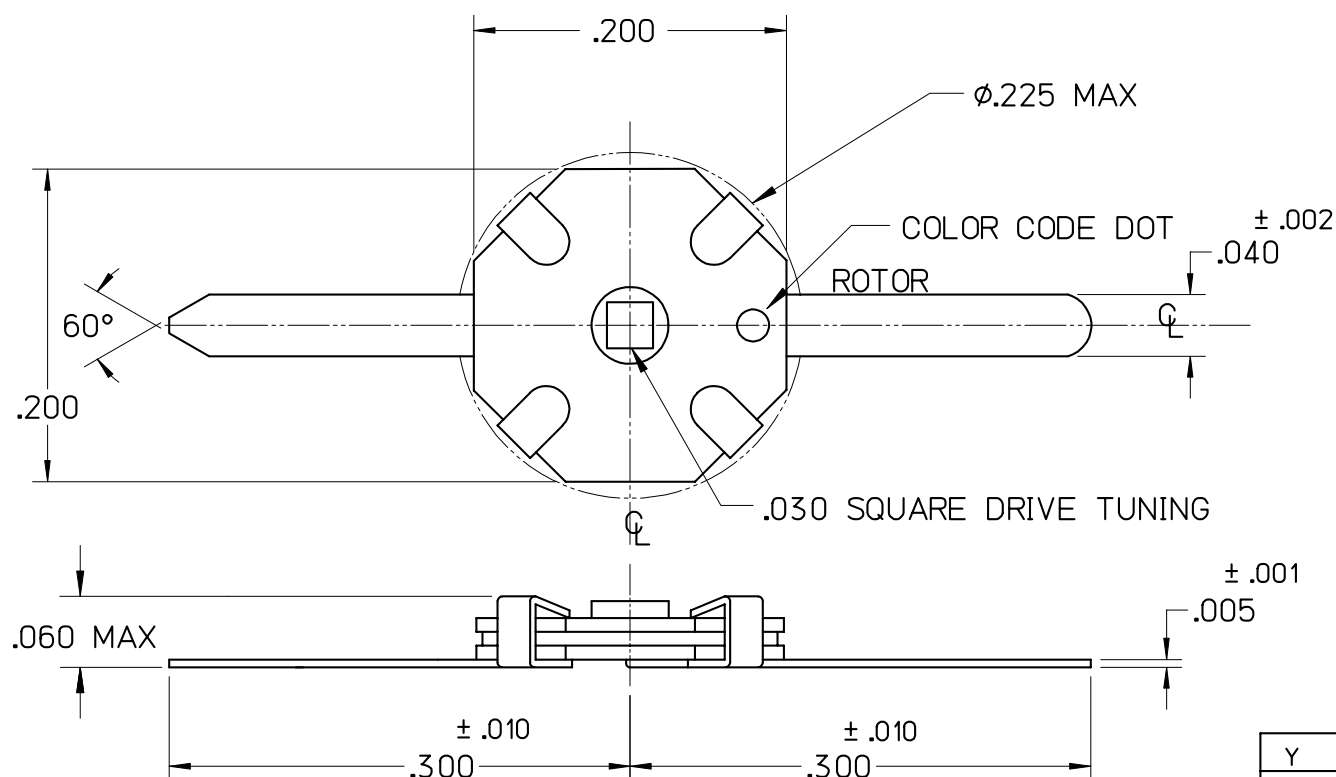

Y	05/04/07	MLD	MAI	MAI	000539
X	12/08/06	MLD	MAI	MAI	000475
W	02/26/99	MLD	-	-	990-060
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
MLD	TAM	WEH	8" = 1"
DATE	DATE	DATE	.XX ± .015
02/26/99	05/19/99	05/19/99	.XXX ± .005

**JOHANSON MANUFACTURING CORPORATION**
 ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL