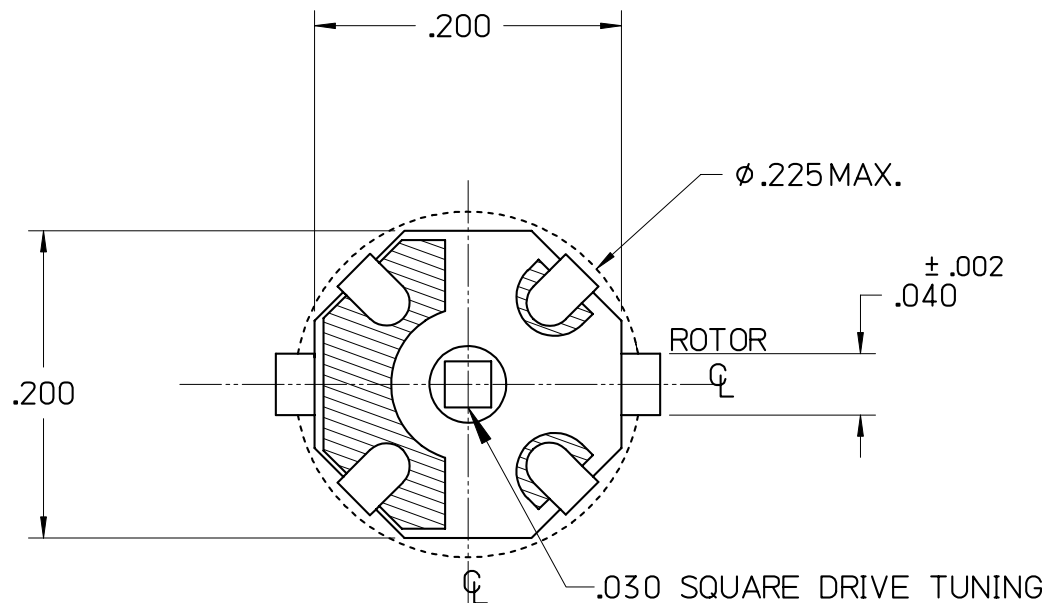



MI DRG. NO.

9710-25SL-1A

REV.

9710-25SL-1 A**THIN-TRIM® CAPACITOR**

SPECIFICATIONS		FILE: THINOUT
CAPACITY RANGE	5.0pF TO 25pF	
WORKING VOLTAGE	250 VDC (TEST VOLTAGE 500 VDC)	
Q @ 100 MHz	>200	
INSULATION RESISTANCE	> 10 ⁴ MEGOHMS	
TEMPERATURE RANGE	-55°C TO +125°C	
TORQUE	0.2 TO 2.0 OZ. IN.	
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106	
SHOCK	100 g @ 6 ms	
VIBRATION	15 g @ 10-2000 Hz	
CERAMIC DIELECTRIC STRUCTURE		
GOLD FINISH KOVAR TERMINALS		
RoHS COMPLIANT		

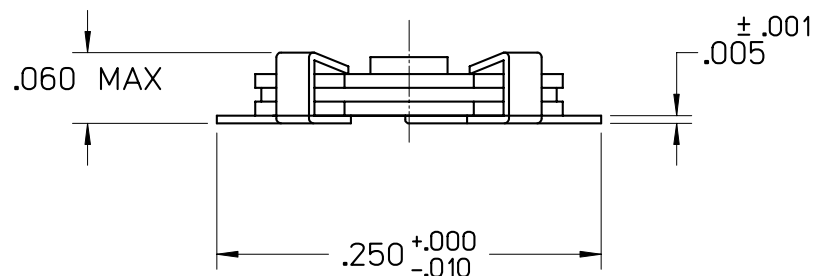

A	05/04/07	MLD	-	-	000539
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
MLD	MAI	MAI	8" = 1"
DATE	DATE	DATE	.XX ± .015
05/04/07	05/04/07	05/04/07	.XXX ± .005



JOHANSON MANUFACTURING CORPORATION
 ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL