


JMC P/N	CAPACITANCE	Q @100 MHz
9820SL	0.5 TO 2.5 pF	> 1000
9821SL	1.0 TO 5.0 pF	> 1000
9822SL	2.5 TO 10 pF	> 1000
9826SL	8.5 TO 25 pF	> 300
9828SL	5.0 TO 15 pF	> 750
9829SL	7.5 TO 20 pF	> 500

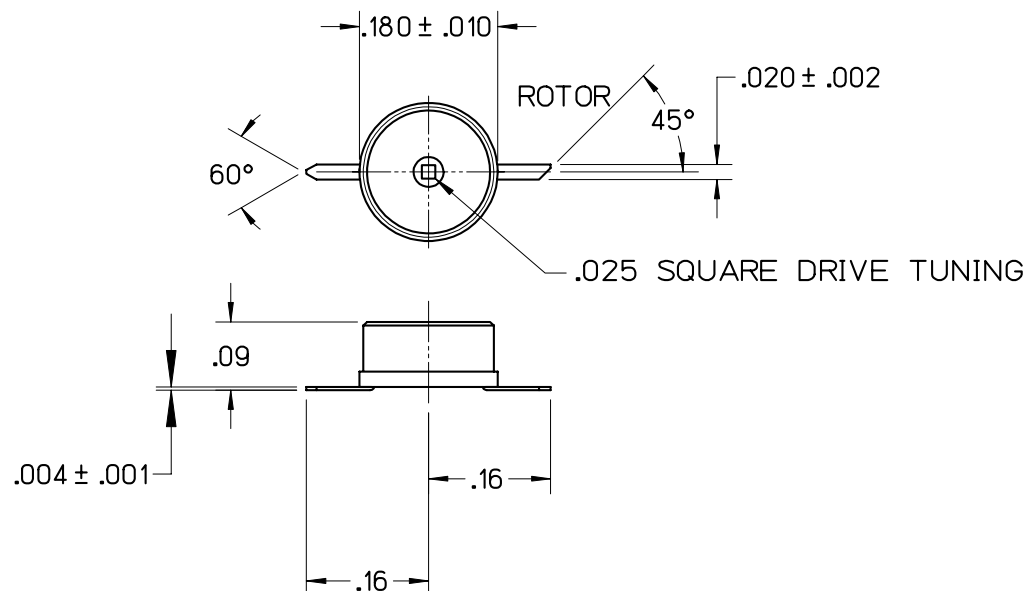

MI DRG. NO. 9820SLB REV.

9820SL B

SEAL-TRIM CAPACITOR

SPECIFICATIONS		FILE: THINOUT
CAPACITY RANGE	SEE TABLE	
WORKING VOLTAGE	250 VDC (TEST VOLTAGE 500 VDC)	
Q @100 MHz	SEE TABLE	
INSULATION RESISTANCE	> 10 ⁴ MEGOHMS	
TEMPERATURE RANGE	-55°C TO +125°C	
TORQUE	0.05 TO 1.0 OZ. IN.	
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106	
SHOCK	100 g @6 ms	
VIBRATION	15 g @10-2000 Hz	
SETTING DRIFT	< 1%	
CERAMIC DIELECTRIC STRUCTURE		
GOLD FINISH TERMINALS		
RoHS COMPLIANT		

B	10/31/06	MAI	MAI	MAI	000464
A	04/24/06	MLD	-	-	000384
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN. MLD	CHK. MAI	APP. MAI	SCALE 4" = 1"
DATE 04/24/06	DATE 05/05/06	DATE 05/05/06	.XX ± .015 .XXX ± .005



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL