
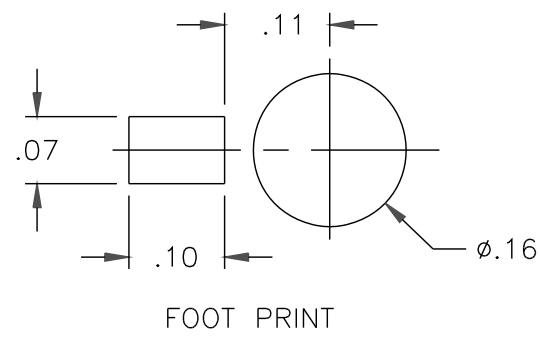
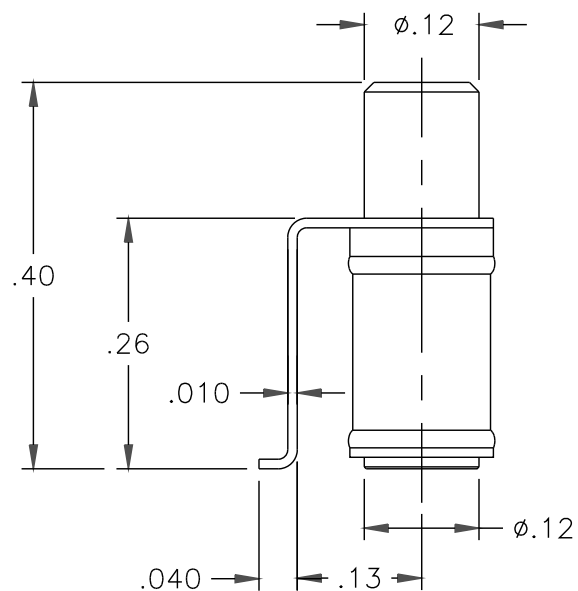


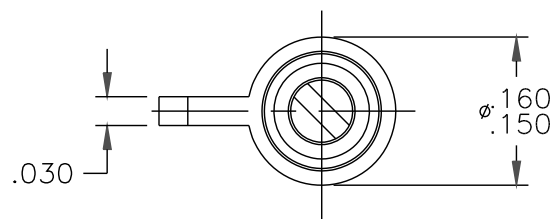

DATE	SYM	REVISION	RECORD	AUTH	DR	CK

NOTES:

1. CAPACITANCE RANGE, pF: 0.45 TO 4.0
2. DC WORKING VOLTAGE AT 4.0 pF: 1000 VDC
3. DC WITHSTANDING VOLTAGE AT 4.0 pF: 2000 VDC
4. Q FACTOR AT 100 MHz AND 4.0 pF: 4000 MIN.
5. INSULATION RESISTANCE: 10^6 MEGOHMS AT 25°C
6. TEMPERATURE COEFFICIENT: 0 ± 50 PPM/°C
7. OPERATING TEMPERATURE: -65°C TO +125°C
8. TUNING TORQUE: 0.3 TO 1.0 IN-OZ
9. VIBRATION: 50g AT 10-2000 Hz
10. SHOCK: 1500g, 0.5 MILLISECS.

TOLERANCES (EXCEPT AS NOTED)	VOLTRONICS CORPORATION 100 FORD RD. DENVER N.J.		
DECIMAL XXX $\pm .005$ XX $\pm .016$	SCALE 5 : 1	DRAWN BY A.SHTABNAYA	
FRACTIONAL —	TITLE OUTLINE DWG. A1M4HV	APPROVED BY A.GOLDBERG	
ANGULAR —	DATE 10/02/09	DRAWING NUMBER 70,633	