
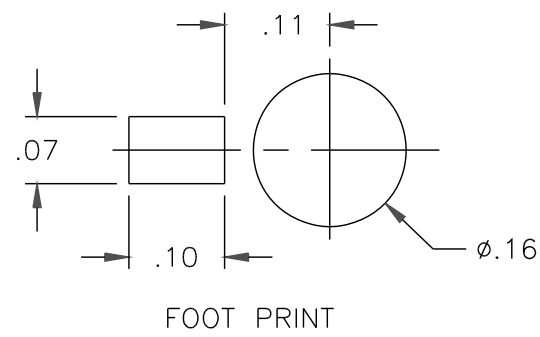
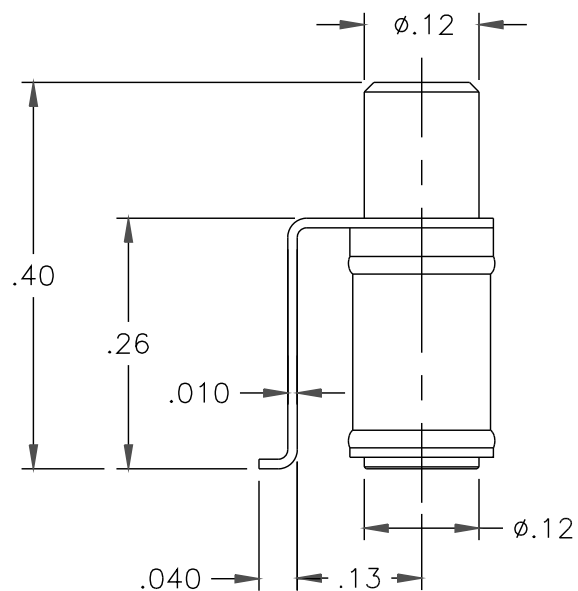


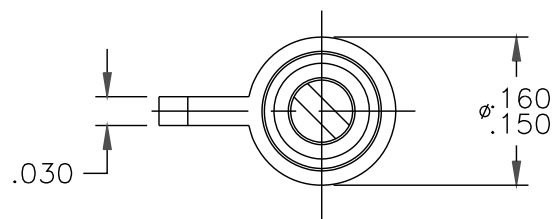

DATE	SYM	REVISION	RECORD	AUTH	DR	CK

NOTES:

1. CAPACITANCE RANGE, pF: 0.5 TO 8.0
2. DC WORKING VOLTAGE AT 8.0 pF: 500 VDC
3. DC WITHSTANDING VOLTAGE AT 8.0 pF: 1000 VDC
4. Q FACTOR AT 100 MHz AND 8.0 pF: 3000 MIN.
5. INSULATION RESISTANCE: 10^6 MEGOHMS AT 25°C
6. TEMPERATURE COEFFICIENT: 0 ± 100 PPM/°C
7. OPERATING TEMPERATURE: -65°C TO +125°C
8. TUNING TORQUE: 0.3 TO 1.0 IN-OZ
9. VIBRATION: 50g AT 10-2000 Hz
10. SHOCK: 1500g, 0.5 MILLISECS.

TOLERANCES (EXCEPT AS NOTED)	VOLTRONICS CORPORATION 100 FORD RD. DENVILLE N.J.		
DECIMAL XXX ±.005 XX ±.016		SCALE 5 : 1	DRAWN BY A.SHTABNAYA APPROVED BY A.GOLDBERG
FRACTIONAL —	TITLE OUTLINE DWG. A1M8HV		
ANGULAR —	DATE 10/02/09	DRAWING NUMBER 70,629	