




DATE	SYM	REVISION	RECORD	AUTH	DR	CK

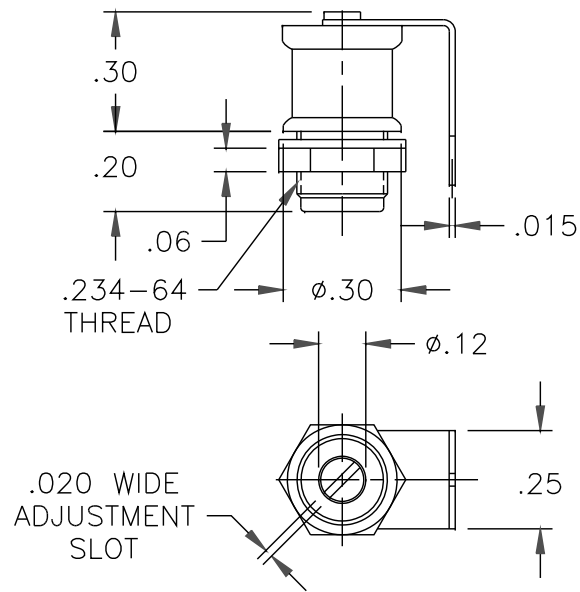

NOTES:

1. CAPACITANCE RANGE, pF: 1.0 TO 10.0
2. DC WORKING VOLTAGE AT 10.0 pF: 250
3. DC WITHSTANDING VOLTAGE AT 10.0 pF: 500
4. Q FACTOR AT 100 MHz: 5000 MIN
5. INSULATION RESISTANCE: 10^6 MEGOHMS AT 25°C.
6. TEMPERATURE COEFFICIENT: 50 ± 50 PPM/°C
7. OPERATING TEMPERATURE: -65°C TO +125°C
8. TUNING TORQUE: 0.5 TO 5.0 IN-QZ
9. ROTATIONAL LIFE: 10,000 TURNS
10. VIBRATION: 50g AT 10-2000 Hz
11. SHOCK: 1500g, 0.5 MILLISECS.
12. SEAL: 40 PSI

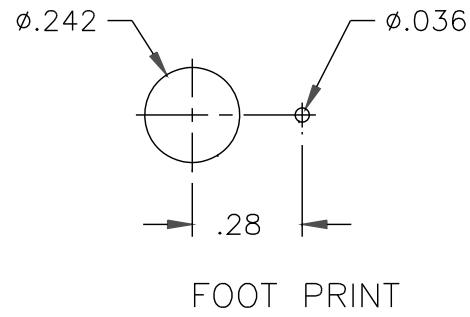

TOLERANCES (EXCEPT AS NOTED)	VOLTRONICS CORPORATION 100 FORD RD. DENVILLE N.J.		
DECIMAL XXX ±.005 XX ±.016		SCALE 2 : 1	DRAWN BY A.SHTABNAYA
			APPROVED BY A.GOLDBERG
FRACTIONAL —	TITLE OUTLINE DWG. AC10		
ANGULAR —	DATE 8/10/10	DRAWING NUMBER 70,987	