


DATE	SYM	REVISION	RECORD	AUTH	DR	CK
9/10/09	A	REDRAWN			AS	AG

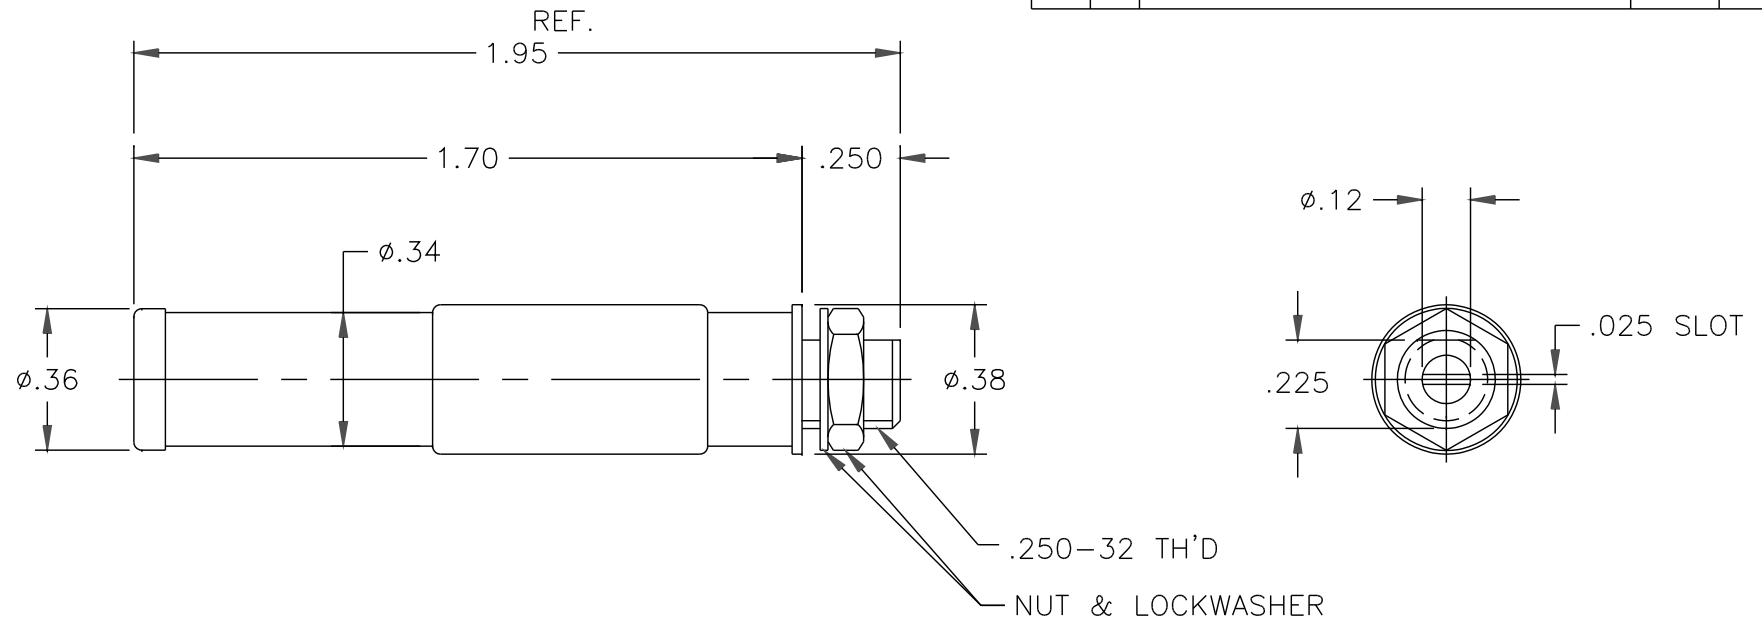

NOTES:

1. CAPACITANCE RANGE, pF: 3.0 TO 23.0
2. DC WORKING VOLTAGE AT 23 pF: 3000 VDC
3. DC WITHSTANDING VOLTAGE AT 23 pF: 6000 VDC
4. Q FACTOR AT 25 MHz: - 2200 MIN.
5. INSULATION RESISTANCE: 10^6 MEGOHMS AT 25°C.
6. TUNING TORQUE: 0.5 TO 4.0 IN-OZ.
7. OPERATING TEMPERATURE: -55°C TO +125°C.

TOLERANCES (EXCEPT AS NOTED)	VOLTRONICS CORPORATION 100 FORD RD. DENVER N.J.		
DECIMAL XXX ±.005 XX ±.016	SCALE 2 : 1		DRAWN BY A.SHTABNAYA
FRACTIONAL —	APPROVED BY A.GOLDBERG		
ANGULAR —	TITLE OUTLINE DWG. NMNT23-6NL		
	DATE 8/18/09	DRAWING NUMBER 70,565	REV.A