


DATE	SYM	REVISION	RECORD	AUTH	DR	CK

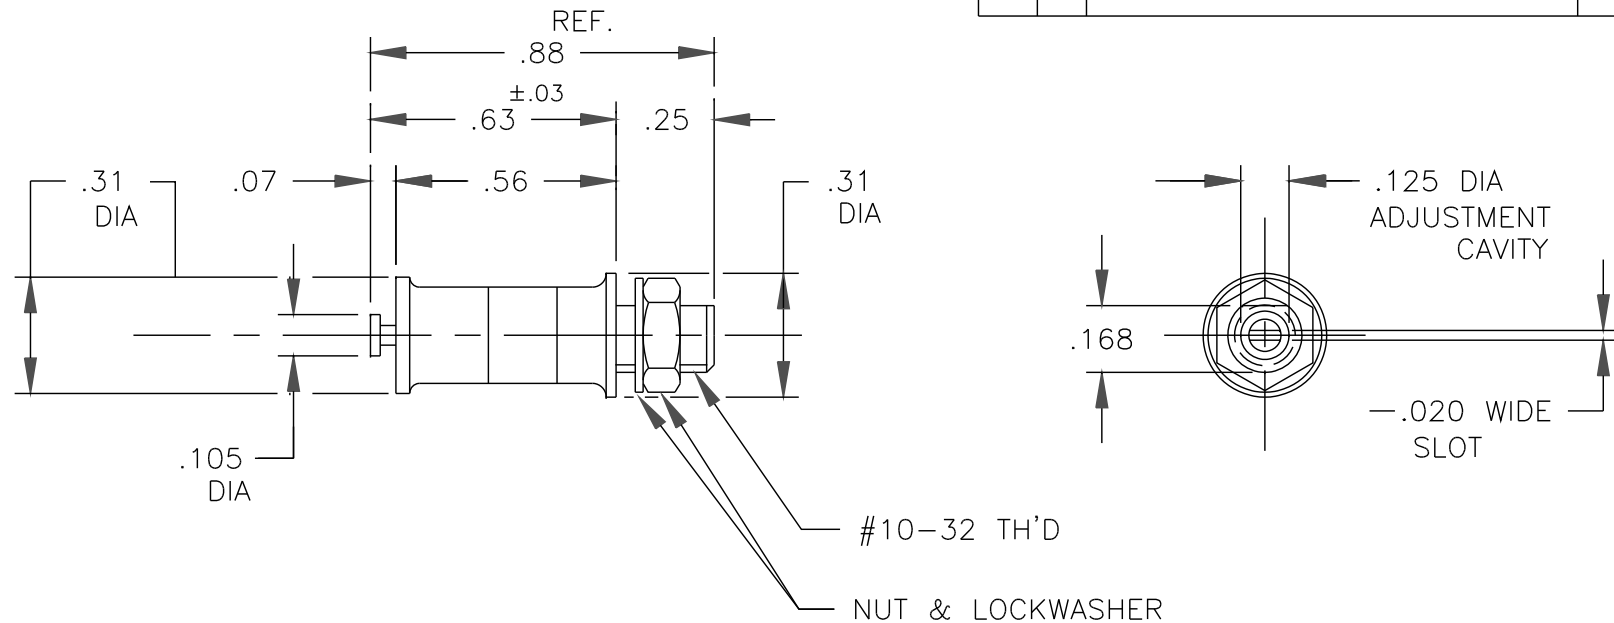

NOTES:

1. CAPACITANCE RANGE, pF: 1.0 TO 11.0
2. DC WORKING VOLTAGE : 750
3. DC WITHSTANDING VOLTAGE: 1500
4. Q FACTOR AT 1 MHz AND 11 pF : 700 MIN
5. INSULATION RESISTANCE: 10^6 MEGOHMS AT 25°C
6. TEMPERATURE COEFFICIENT: ± 50 ppm/°C.
7. OPERATING TEMPERATURE: -55°C TO +125°C
8. TUNING TORQUE: 1.0 TO 8.0 IN-OZ
9. ROTATIONAL LIFE: 10,000 TURNS
10. VIBRATION: 50g AT 10-2000 Hz
11. SHOCK: 1500g, 0.5 MILLISECS.
12. SEAL: 40 PSI

TOLERANCES (EXCEPT AS NOTED)	VOLTRONICS CORPORATION 100 FORD RD. DENVILLE N.J.		
DECIMAL XXX ±.005 XX ±.016		SCALE 2 : 1	DRAWN BY V.KALIKHOVSKY
			APPROVED BY D.DITLYA
FRACTIONAL —	TITLE OUTLINE DWG. TM11C		
ANGULAR —	DATE 10/16/95	DRAWING NUMBER 7,686	