
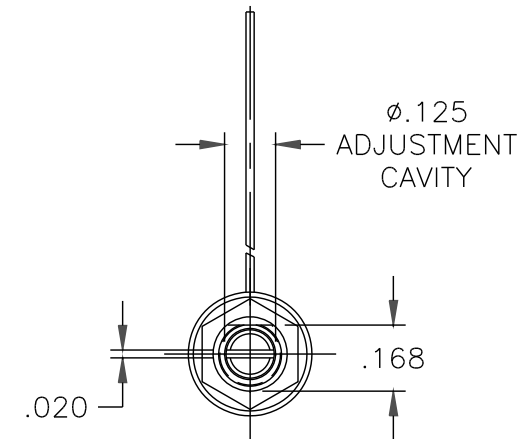


DATE	SYM	REVISION	RECORD	AUTH	DR	CK
3/25 10	A	REDRAWN, ADDED NUT & WASHER TO SIDE VIEW			AS	AG

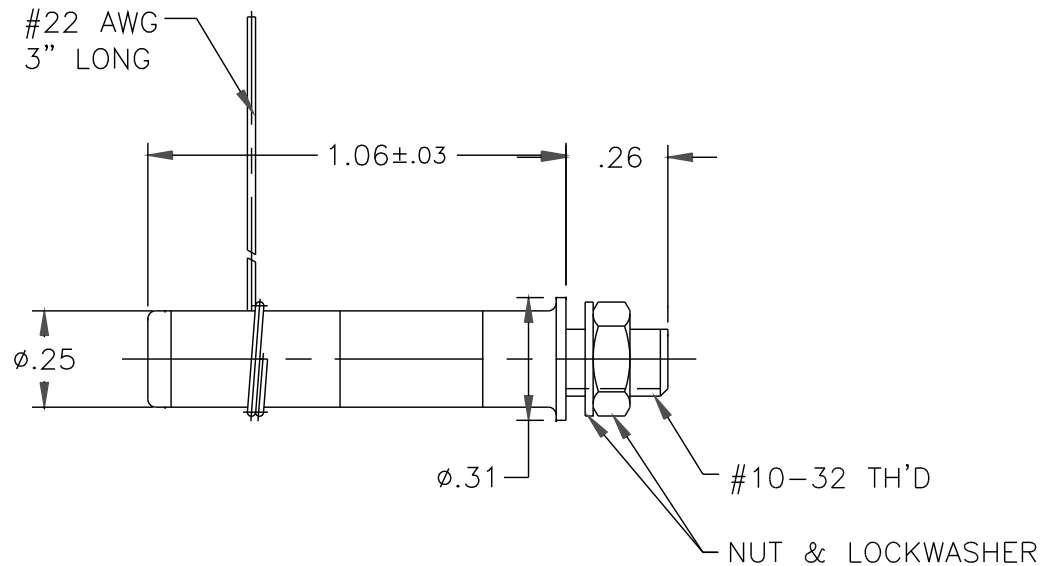

NOTES:

1. CAPACITANCE RANGE, pF: 0.8 TO 18.0
2. DC WORKING VOLTAGE AT 18 pF: 1250.
3. DC WITHSTANDING VOLTAGE AT 18 pF: 2500.
4. Q FACTOR AT 1 MHz: 650 MIN.
5. INSULATION RESISTANCE: 10^6 MEGOHMS AT 25°C
6. TUNING TORQUE: 1.0 TO 8.0 IN-OZ
7. OPERATING TEMPERATURE: -55°C TO +125°C
8. TEMPERATURE COEFFICIENT: ± 50 PPM/°C.
9. SEAL: 40 PSI

TOLERANCES (EXCEPT AS NOTED)	VOLTRONICS CORPORATION 100 FORD RD. DENVILLE N.J.		
DECIMAL XXX ±.005 XX ±.016		SCALE 2 : 1	DRAWN BY A.SHTABNAYA
			APPROVED BY A.GOLDBERG
FRACTIONAL —	TITLE OUTLINE DWG. TM18G		
ANGULAR —	DATE 12/03/09	DRAWING NUMBER 70,760 REV.A	