**Electrical Details**

Electrical Configuration	C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000MΩ
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	Not Applicable

**C****Mechanical Details**

Head Diameter	4.4mm (0.173")
Nut A/F	N/a. For use in tapped hole
Washer Diameter	N/a
Mounting Torque	0.18Nm (1.59lb/in) max.
Mounting Hole	M3.5 x 0.5 - 6h
Max. Panel Thickness	N/a
Weight (Typical)	0.8g (0.03oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance (±20%) UOS	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)					
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFKKC5000100ZC	10pF -20% / +80%	COG/NP0	500#	750						4
SFKKC5000150ZC	15pF -20% / +80%									7
SFKKC5000220ZC	22pF -20% / +80%									10
SFKKC5000330ZC	33pF -20% / +80%									12
*SFKKC5000470ZC	47pF -20% / +80%									1
*SFKKC5000680MC	68pF									15
*SFKKC5000101MC	100pF									2
SFKKC5000151MC	150pF									18
*SFKKC5000221MC	220pF									22
*SFKKC5000331MC	330pF									25
*SFKKC5000471MX	470pF	+X7R	500#	750						10
SFKKC5000681MX	680pF									29
*SFKKC5000102MX	1.0nF									33
SFKKC5000152MX	1.5nF									35
*SFKKC5000222MX	2.2nF									36
SFKKC5000332MX	3.3nF									41
*SFKKC5000472MX	4.7nF									45
SFKKC5000682MX	6.8nF									50
*SFKKC5000103MX	10nF									52
*SFKKC5000153MX	15nF									55
*SFKKC5000223MX	22nF									57
SFKKC5000333MX	33nF									60
*SFKKC2000473MX	47nF									62
SFKKC2000683MX	68nF									65
*SFKKC1000104MX	100nF									68
*SFKKC0500154MX	150nF									>70

Also rated for operation at 115Vac 400Hz. Self heating will occur – evaluation in situ recommended. * Recommended values. † Also available in COG/NP0.

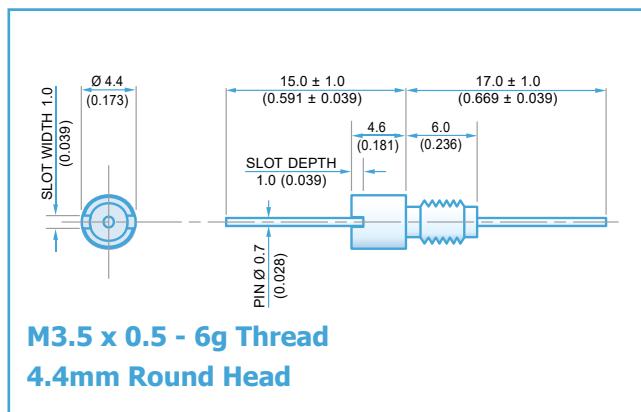
Ordering Information - SFKKC range

SF	K	K	C	500	0101		M	C	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)		Tolerance	Dielectric	Nuts & Washers
Syfer Filter	4.4mm O.D.	M3.5	C = C Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NP0 X = X7R	0 = Without	


Note: Installation tool available on request

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.

Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

**Electrical Details**

Electrical Configuration	L-C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000MΩ
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	50nH

**Mechanical Details**

Head Diameter	4.4mm (0.173")
Nut A/F	N/A. For use in tapped hole
Washer Diameter	N/A
Mounting Torque	0.18Nm (1.59lbf in) max.
Mounting Hole	M3.5 x 0.6 - 6h
Max. Panel Thickness	N/
Weight (Typical)	0.8g (0.03oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance (±20%) UOS	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)					
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFKKL5000100ZC	10pF -20% / +80%	COG/NP0	500#	750						6
SFKKL5000150ZC	15pF -20% / +80%									9
SFKKL5000220ZC	22pF -20% / +80%									12
SFKKL5000330ZC	33pF -20% / +80%									1
*SFKKL5000470ZC	47pF -20% / +80%									15
*SFKKL5000680MC	68pF									2
*SFKKL5000101MC	100pF									19
SFKKL5000151MC	150pF									4
*SFKKL5000221MC	220pF									20
*SFKKL5000331MC	330pF									7
*SFKKL5000471MX	470pF	†X7R	500#	750						24
SFKKL5000681MX	680pF									10
*SFKKL5000102MX	1.0nF									12
SFKKL5000152MX	1.5nF									30
*SFKKL5000222MX	2.2nF									34
SFKKL5000332MX	3.3nF	X7R	200	500						1
*SFKKL5000472MX	4.7nF									15
SFKKL5000682MX	6.8nF									18
*SFKKL5000103MX	10nF									39
*SFKKL5000153MX	15nF									57
*SFKKL5000223MX	22nF									2
SFKKL5000333MX	33nF									21
*SFKKL2000473MX	47nF									41
SFKKL2000683MX	68nF									60
*SFKKL1000104MX	100nF									63
*SFKKL0500154MX	150nF									66

Also rated for operation at 115Vac 400Hz. Self-heating will occur – evaluation in situ recommended. * Recommended values. † Also available in COG/NP0.

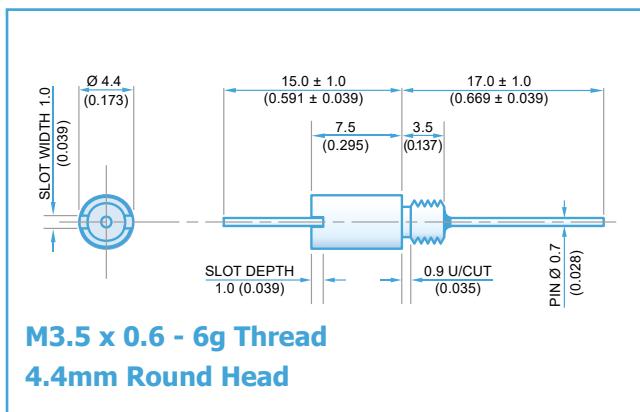
Ordering Information - SFKKL range

SF	K	K	L	500	0101		M	C	O
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)		Tolerance	Dielectric	Nuts & Washers
Syfer Filter	4.4mm O.D.	M3.5	L = L-C Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NP0 X = X7R	0 = Without	

Note: Installation tool available on request

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.

Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

**Electrical Details**

Electrical Configuration	T Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000MΩ
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	100nH

**Mechanical Details**

Head Diameter	4.4mm (0.173")
Nut A/F	N/A. For use in tapped hole
Washer Diameter	N/A
Mounting Torque	0.18Nm (1.59lb/in) max.
Mounting Hole	M3.5 x 0.5 - 6h
Max. Panel Thickness	N/A
Weight (Typical)	0.8g (0.03oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance (±20% UOS)	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)							
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz		
*SFKKT5000100ZC	10pF -20% / +80%	C0G/NP0	500#	750						9		
SFKKT5000150ZC	15pF -20% / +80%									11		
SFKKT5000220ZC	22pF -20% / +80%									1	14	
SFKKT5000330ZC	33pF -20% / +80%									2	18	
*SFKKT5000470ZC	47pF -20% / +80%									4	20	
*SFKKT5000680MC	68pF									6	23	
*SFKKT5000101MC	100pF									9	27	
SFKKT5000151MC	150pF									12	30	
*SFKKT5000221MC	220pF									15	33	
*SFKKT5000331MC	330pF									1	19	36
*SFKKT5000471MX	470pF	+X7R	500#	750						2	21	40
SFKKT5000681MX	680pF									4	24	43
*SFKKT5000102MX	1.0nF									7	28	47
SFKKT5000152MX	1.5nF									10	30	50
*SFKKT5000222MX	2.2nF									13	34	53
SFKKT5000332MX	3.3nF	X7R	200	500						17	38	57
*SFKKT5000472MX	4.7nF									19	40	59
SFKKT5000682MX	6.8nF									1	23	43
*SFKKT5000103MX	10nF									4	26	45
*SFKKT5000153MX	15nF									7	29	47
*SFKKT5000223MX	22nF									10	33	49
SFKKT5000333MX	33nF									14	36	50
*SFKKT2000473MX	47nF									17	39	52
SFKKT2000683MX	68nF									20	42	57
*SFKKT1000104MX	100nF									22	46	62
*SFKKT0500154MX	150nF									25	49	68

Also rated for operation at 115Vac 400Hz. Self-heating will occur – evaluation in situ recommended. * Recommended values. † Also available in C0G/NP0.

Ordering Information - SFKKT range

SF	K	K	T	500	0101		M	C	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)		Tolerance	Dielectric	Nuts & Washers
Syfer Filter	4.4mm O.D.	M3.5	T = T Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = C0G/NP0 X = X7R	0 = Without	

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.

Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

* Mounting tool available.