


P/N: 932341


Ceramic Bandpass Filter



Features/Benefits

- SMA-F Connectors
- Made in U.S.A.


Parameter	Specification
Center Frequency (Fo)	1000 MHz
VSWR	1.5 max @ 1000 MHz
Insertion Loss	-1.0 dBa max @ 1000 MHz
Rejection	-40 dBc min @ 2000 MHz
Temperature, Operating	-20°C to +70°C
Temperature, Storage	-20°C to +70°C
Mechanical Dimensions	1.500 x 0.750 x 0.375 inches [38.10 x 19.05 x 9.53 mm] (L X W X H)

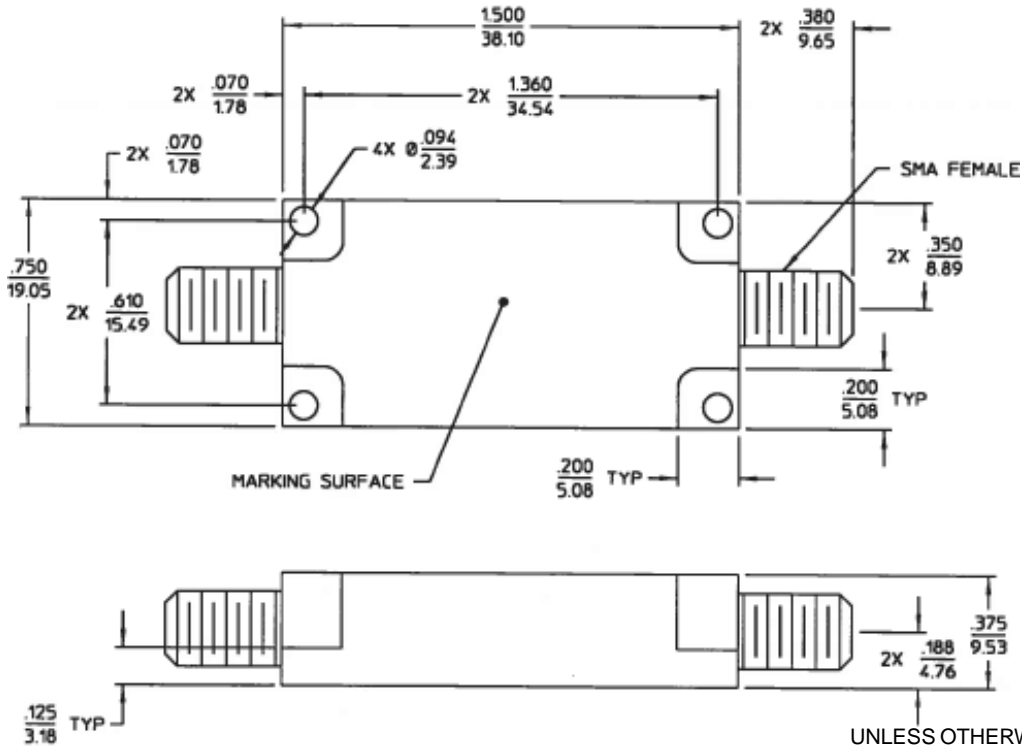

This document contains proprietary information and is to be used only for the purposes for which it has been supplied and is not to be duplicated or disclosed in whole or in part without written permission from a duly authorized representative of Knowles.

Phone: 1-315-655-8710 • Email: KPD-NA-sales@lesknow.com • www.knowlesc capacitors.com

Product and product information are subject to change without notice.

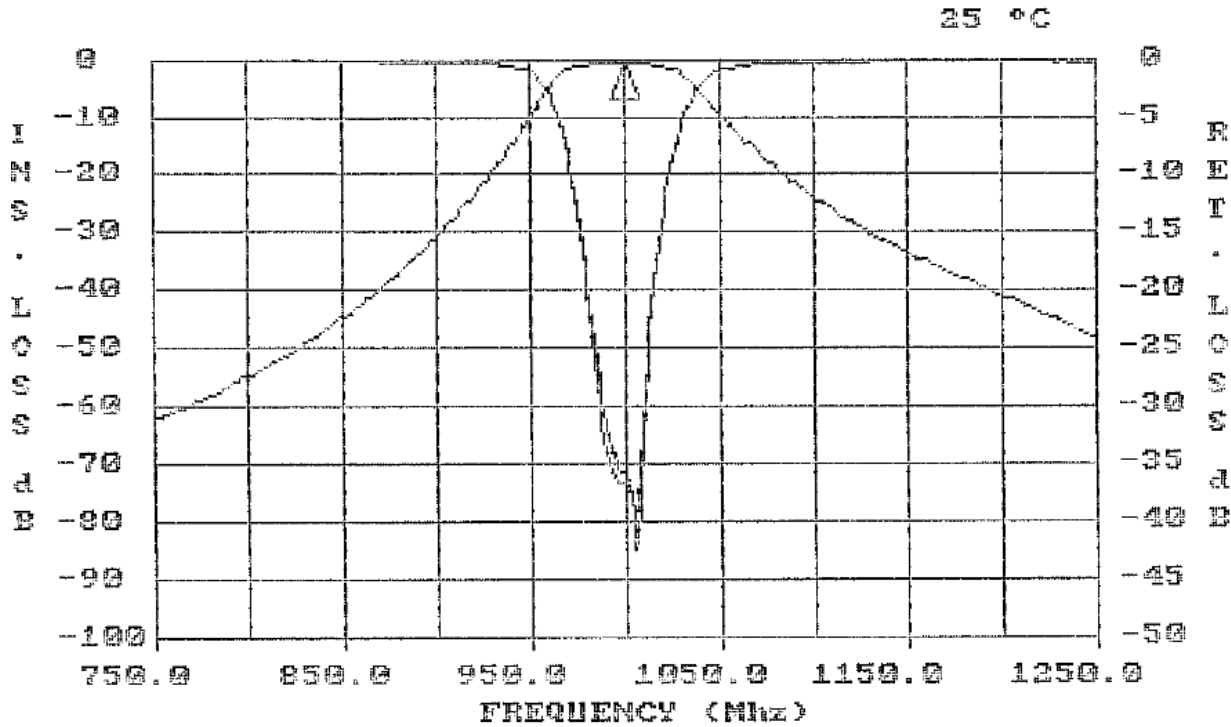


FREQUENCY (MHZ)	VALUE	SPEC	COMMENTS
1000	-54.7 dbA	-1 dbA MAX	
FREQUENCY (MHZ)	VALUE	SPEC	COMMENTS
1000		1.5 :1 MAX	(S11) - VSWR
1000		1.5 :1 MAX	(S22) - VSWR

This document contains proprietary information and is to be used only for the purposes for which it has been supplied and is not to be duplicated or disclosed in whole or in part without written permission from a duly authorized representative of Knowles.

Phone: 1-315-655-8710 • Email: KPD-NA-sales@lesknow.com • www.knowlescapacitors.com

Product and product information are subject to change without notice.

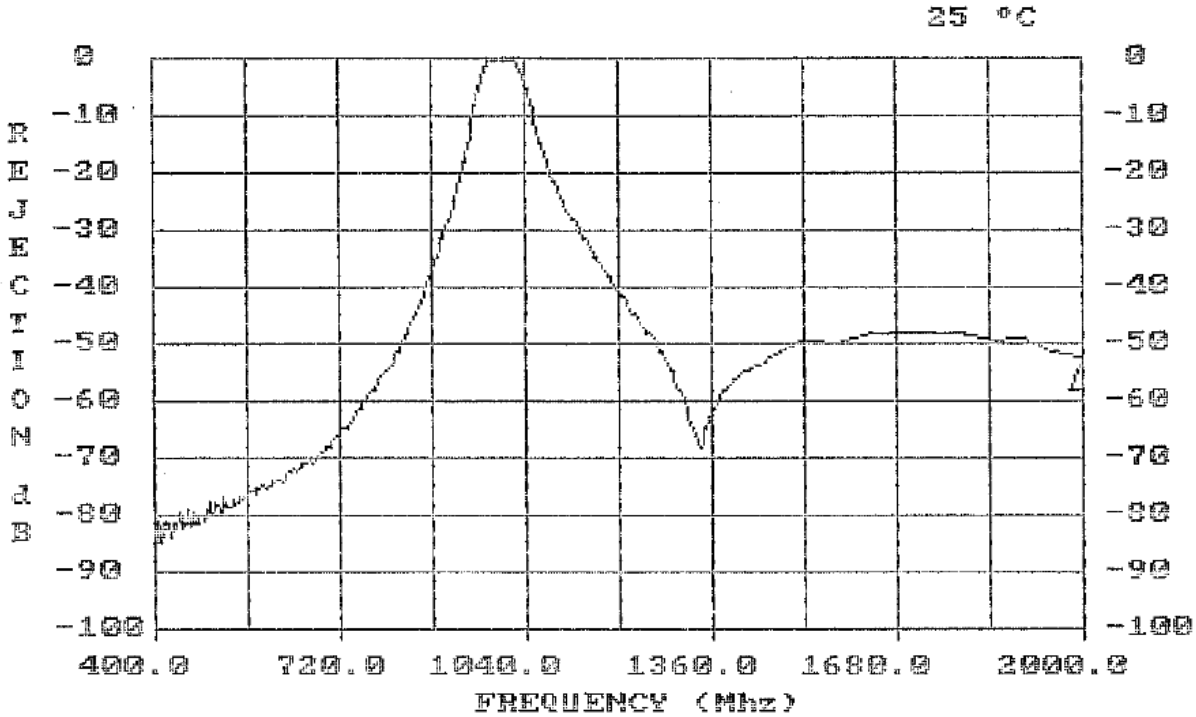

FREQUENCY (MHZ)	VALUE	SPEC	COMMENTS
2000	-51.8 dbc	-40 dbc MIN	

This document contains proprietary information and is to be used only for the purposes for which it has been supplied and is not to be duplicated or disclosed in whole or in part without written permission from a duly authorized representative of Knowles.

Phone: 1-315-655-8710 • Email: KPD-NA-sales@lesknow.com • www.knowlesc capacitors.com

Product and product information are subject to change without notice.