

## 11.75GHz and 14.1GHz Surface Mount Diplexer ADP12055

[www.knowlesc capacitors.com](http://www.knowlesc capacitors.com)

### DESCRIPTION

This DLI brand surface mount catalog diplexer is designed to cover Satcom bands centered at 11.75GHz and 14.1GHz. This diplexer utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature while leveraging thin film technology to offer a drop in solution with highly repeatable performance.

### FEATURES

- Small Size
- Integrated 3-Sided Stainless Steel Cover
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

### SPECIFICATIONS

	Parameter	Frequency Range (GHz)	Min	Typ.	Max
<b>Filter 1 LOW BAND</b>	<b>Insertion Loss (dB)</b>	10.7 - 12.75		1.9	3.5
	<b>Return Loss (dB)</b>	10.7 - 12.75	10	19	
	<b>Low Side Rejection (dB)</b>	DC - 9.75	40	55	
	<b>High Side Rejection (dB)</b>	13.75—14.5 14.5 - 23.0	40 40	43 55	
<b>Filter 2 HIGH BAND</b>	<b>Insertion Loss (dB)</b>	13.75 - 14.5		1.7	3.5
	<b>Return Loss (dB)</b>	13.75 - 14.5	10	18	
	<b>Low Side Rejection (dB)</b>	DC - 12.75 10.7 - 12.75	40 40	45 57	
	<b>High Side Rejection (dB)</b>	15.5 - 23.0	40	50	
<b>Isolation (dB)</b>		10.7-12.75	45	57	
		13.75-14.5	38	43	
<b>Input Power (W)</b>	10				
<b>Size (L x W x H)</b>	0.500.x 0.370 x 0.093 in 12.7 x 9.39 x 2.36 mm				

\*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary  $\pm 0.5$ dB over temperature.


Information in this document is for informational and guideline purposes only. All information regarding the Product described in this datasheet is subject to change from time to time at Knowles Precision Devices' sole discretion. It is the customer's sole responsibility to evaluate the suitability of the Product in the customer's particular application. Knowles Precision Devices assumes no responsibility or liability for the use of the information contained within.  
2777 Route 20 East, Cazenovia, NY 13035| Ph.: (315)655-8710

To Order Contact [KCCSales@knowles.com](mailto:KCCSales@knowles.com) | For Technical Inquiries Contact [DLIengineering@knowles.com](mailto:DLIengineering@knowles.com)


**11.75GHz and 14.1GHz Surface Mount Diplexer  
 ADP12055**

[www.knowlescapacitors.com](http://www.knowlescapacitors.com)


**Typical Measured Performance**

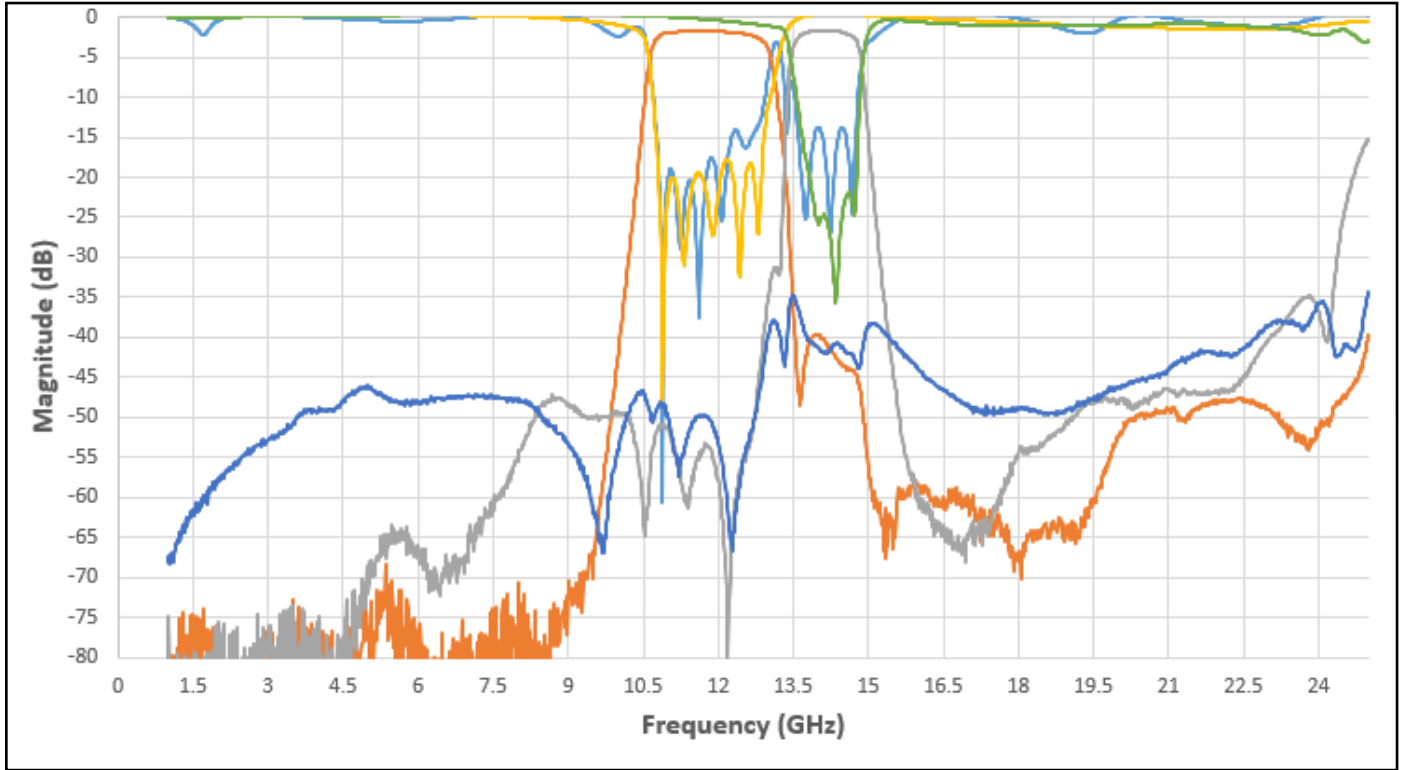

**FILTER 1 (LOW BAND)**

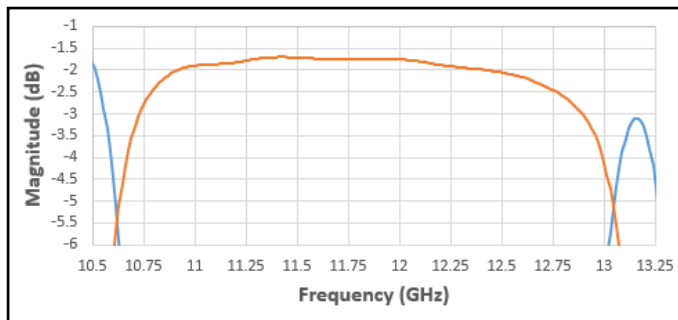

**FILTER 2 (HIGH BAND)**

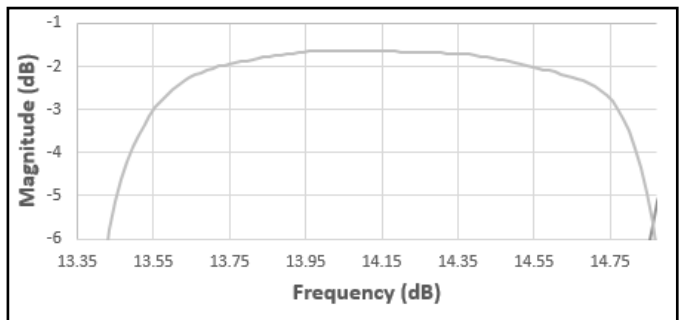


2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710

To Order Contact [KCCSales@knowles.com](mailto:KCCSales@knowles.com) | For Technical Inquiries Contact [DLengineering@knowles.com](mailto:DLengineering@knowles.com)

**11.75GHz and 14.1GHz Surface Mount Diplexer  
ADP12055**

**Physical Dimensions Units = inches (in)**

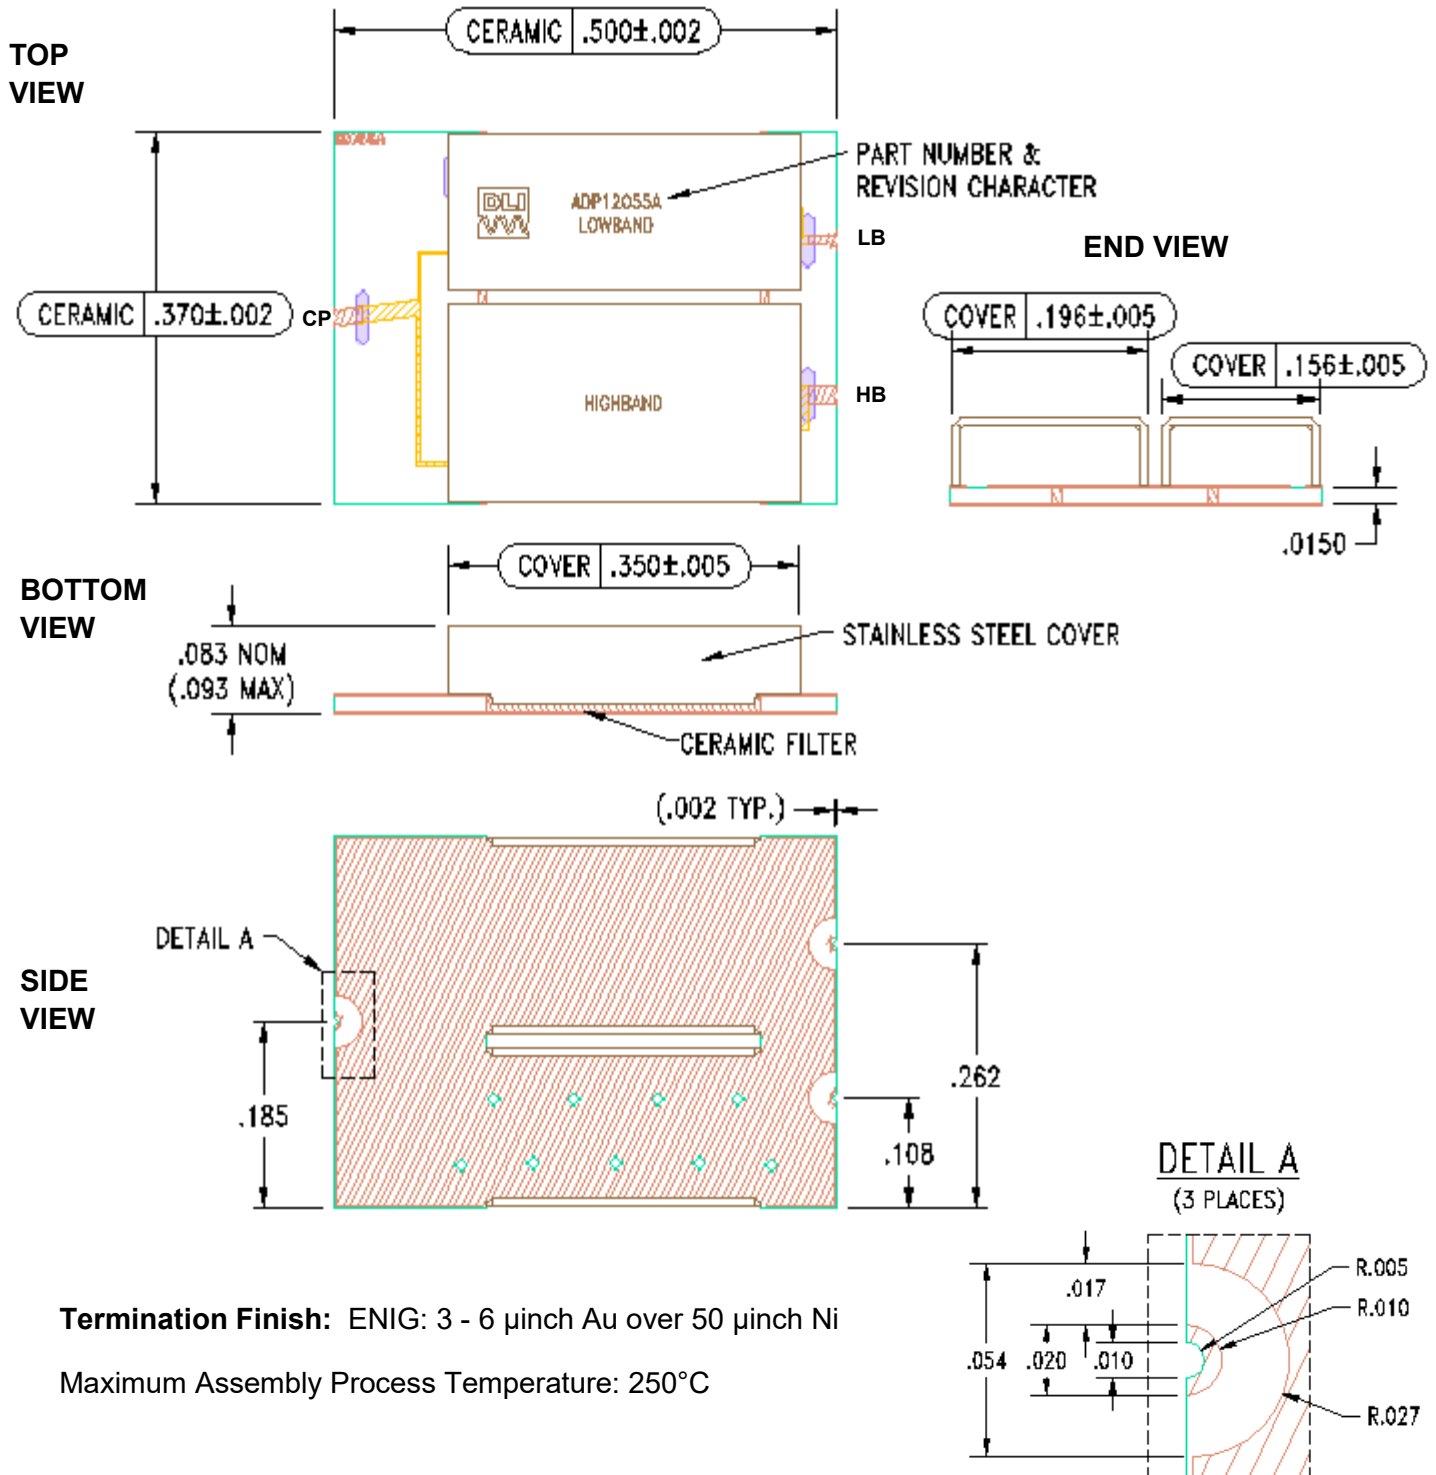

**Termination Finish:** ENIG: 3 - 6 μinch Au over 50 μinch Ni


Maximum Assembly Process Temperature: 250°C

2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710

To Order Contact [KCCSales@knowles.com](mailto:KCCSales@knowles.com) | For Technical Inquiries Contact [DLengineering@knowles.com](mailto:DLengineering@knowles.com)


**11.75GHz and 14.1GHz Surface Mount Diplexer  
 ADP12055**

**Recommended PCB Layout ( unit = mil)**

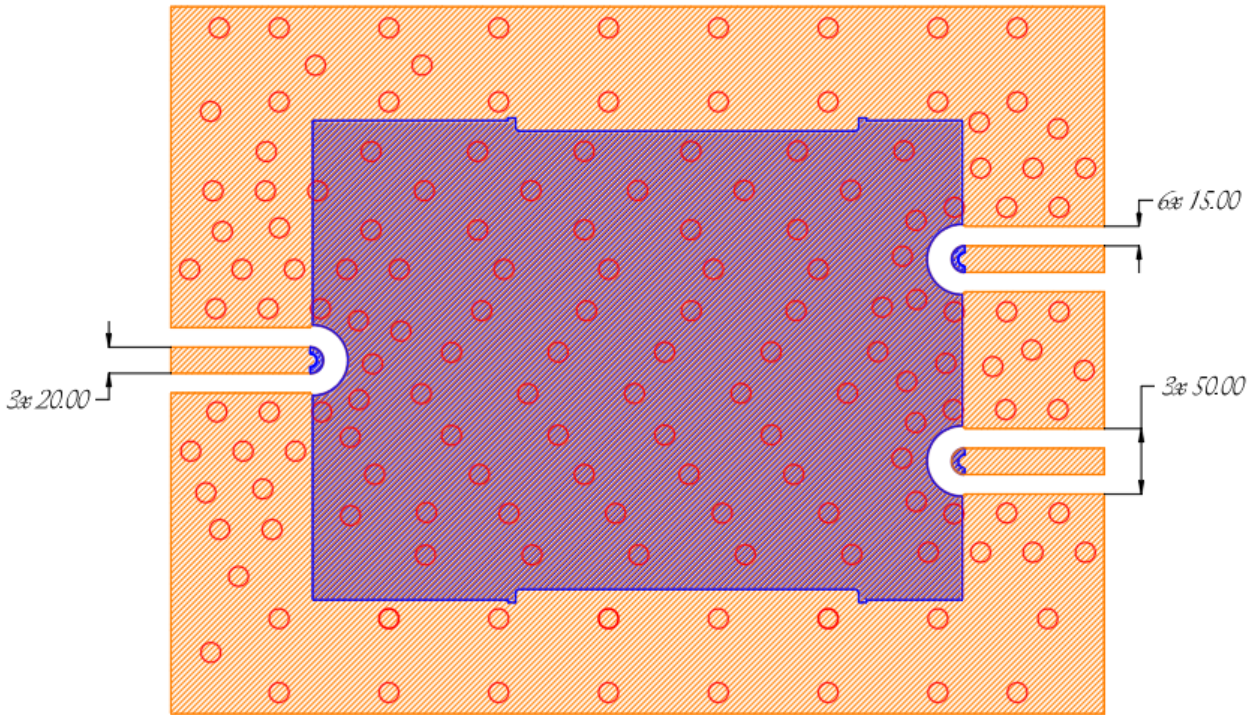

**PCB RECOMMENDED STACKUP**

Filter is matched to RF layer stackup seen below  
 Dimensions are specified below in inches ( not to scale)  
 Board material : RO4350b  
 Board material design dk : 3.66  
 CPWG : 20mil trace width, 15mil gaps

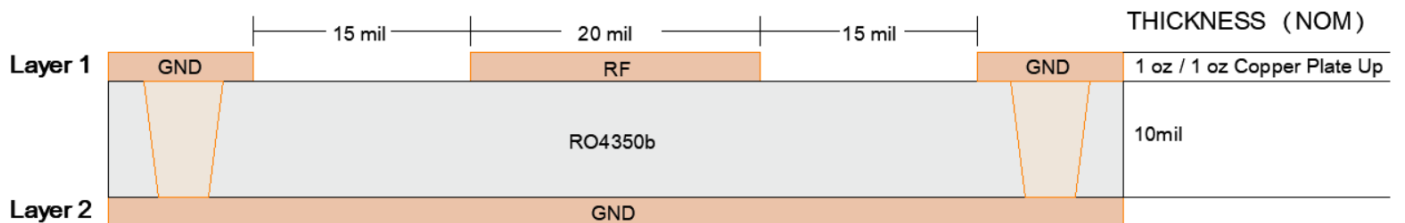

For further details and best practices, reference the **Microwave Products Guide**, available at: <https://www.knowlescapacitors.com/Support/Catalogs>

2777 Route 20 East, Cazenovia, NY 13035| Ph.: (315)655-8710

To Order Contact [KCCSales@knowles.com](mailto:KCCSales@knowles.com) | For Technical Inquiries Contact [DLengineering@knowles.com](mailto:DLengineering@knowles.com)