

Quadrature Hybrid Coupler Series

Surface Mount Devices Preliminary Datasheet

www.knowlesc capacitors.com

DESCRIPTION

DLI's Quadrature Hybrid Couplers offer unmatched size and wideband performance in a surface mount configuration. These 3 dB couplers offers excellent phase and amplitude balance with low loss and good isolation. As catalog components, they are available in a variety of frequency bands which offers a drop in solution with highly repeatable performance.

Packaging and Ordering Information

For packaging in tape and reel please use part number: FHC#####-T

SPECIFICATIONS*

Product Number	Frequency (GHz) Low	Frequency (GHz) High	Typical Insertion Loss (dB)	Typical Return Loss (dB)	Isolation (dB)	Amplitude Balance (dB)
FHC09096	4	8	0.35	20.00	22	0.4
FHC09097	4	8	1.00	16.50	17	0.2
FHC10288	6	12	1.00	16.50	17	0.3
FHC10290	10	20	0.80	16.50	20	0.2
FHC10292	6	18	0.80	16.50	20	0.4

*Electrical specifications based on typical mounted performance at room temperature. Insertion loss may vary ± 0.5 dB over temperature.

FEATURES

- Small Size
- 90° Phase Delta between Output Ports
- >50W Power Handling
- Solder Surface Mount Package
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Moisture Sensitivity Level: MSL1
- Characteristic Impedance: 50Ω

Quadrature Hybrid Coupler Port Configuration Options

	Port 1	Port 2	Port 3	Port 4
Configuration 1	Input	Isolated	Coupled	Output
Configuration 2	Isolated	Input	Output	Coupled
Configuration 3	Coupled	Output	Input	Isolated
Configuration 4	Output	Coupled	Isolated	Input




2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLIengineering@knowles.com

Quadrature Hybrid Coupler Series
Surface Mount Devices Preliminary Datasheet

www.knowlescapacitors.com

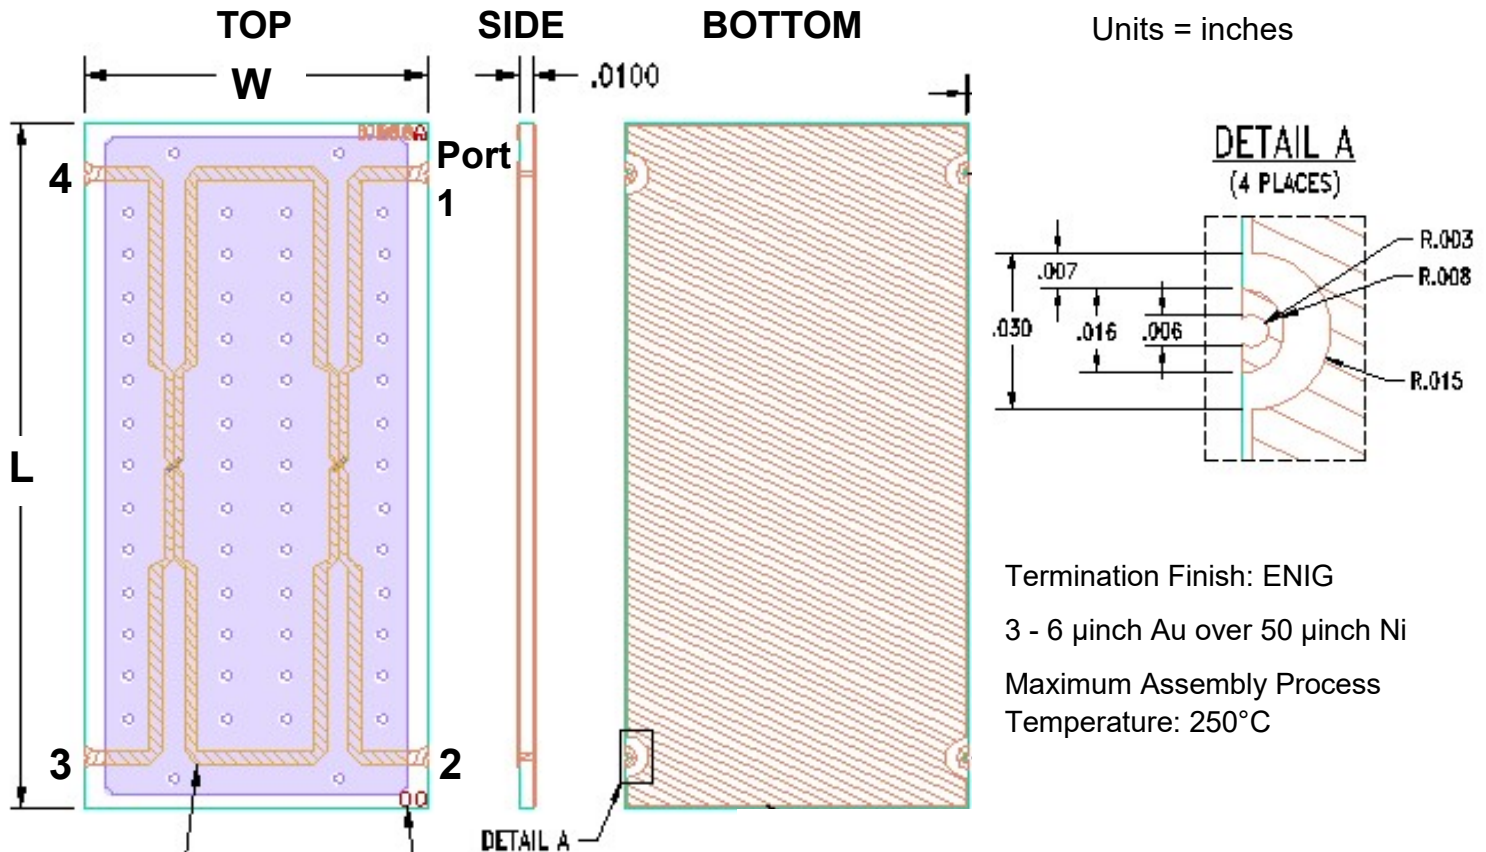

Termination Finish: ENIG

3 - 6 μinch Au over 50 μinch Ni

Maximum Assembly Process Temperature: 250°C

Recommended PCB

Parameters:

- 0.010 inch Rogers Board RO4350B
- 3.66 dK, Board Material design
- Dimensions of 50.0 Ohm CPWG :
0.016 in. RF trace width
0.007 in. spacing

Product Number	Length (in)	Width (in)	Height (in)	Length (mm)	Width (mm)	Height (mm)
FHC09096	0.3	0.15	0.01	7.62	3.81	0.254
FHC09097	0.7	0.26	0.01	17.78	6.604	0.254
FHC10288	0.5	0.25	0.01	12.7	6.35	0.254
FHC10290	0.3	0.25	0.01	7.62	6.35	0.254
FHC10292	0.35	0.25	0.01	8.89	6.35	0.254

Contact DLIengineering@knowles.com for drawings and recommended PCB layouts

For more information on how to mount this SMD part, refer to the SMD Guide, available in the Thin Film section of <https://www.knowlescapacitors.com/Support/Resources>

2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLIengineering@knowles.com