

10 GHz 2-way Wilkinson Power Divider

PDW06399

www.knowlescapacitors.com

DESCRIPTION

DLI's 10 GHz 2-way power divider / combiner offers unmatched size and performance in a surface mount configuration. This power divider utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature.

Packaging and Ordering Information:

To request tape and reel packaging, please order part number PDW06399-T, see page 5.

FEATURES

- Small Size
- Frequency Stable over Temperature
- Solder Surface Mount Package
- Excellent Repeatability
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

Orderable Part Number	Packaging
PDW06399	Bulk
PDW06399-T	Tape and Reel
DEB06399	Design Evaluation Board

SPECIFICATIONS*

Parameter	Frequency Range (GHz)	Min	Typ.	Max
Nominal Power Splitting (dB)	9 - 11		3.0	
Nominal Phase Shift (Deg)			0.0	
Excess Insertion Loss (dB)			0.4	
Return Loss (dB)		14	20	
Amplitude Balance (dB)			± 0.25	
Phase Balance (Deg)			± 5.0	
Isolation (dB)		14		
Max CW Input Power as Divider (W)**			10	
Max CW Input Power as Combiner (W)**			5	

*Electrical specifications based on typical mounted performance at room temperature. Insertion loss shall vary ±0.5dB over temperature.

**Power rating assumes the component will be mounted to a PCB with good thermally conducting ground via's as outlined in the recommended PCB layout that are connected to an adequate heat sink. Max power is based on 85°C base temperature.

***Power rating as a combiner assumes that the incoming signals are of equal amplitude and phase.

2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710




To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLLengineering@knowles.com

10 GHz 2-way Wilkinson Power Divider

PDW06399

www.knowlescapacitors.com

Typical Measured Performance

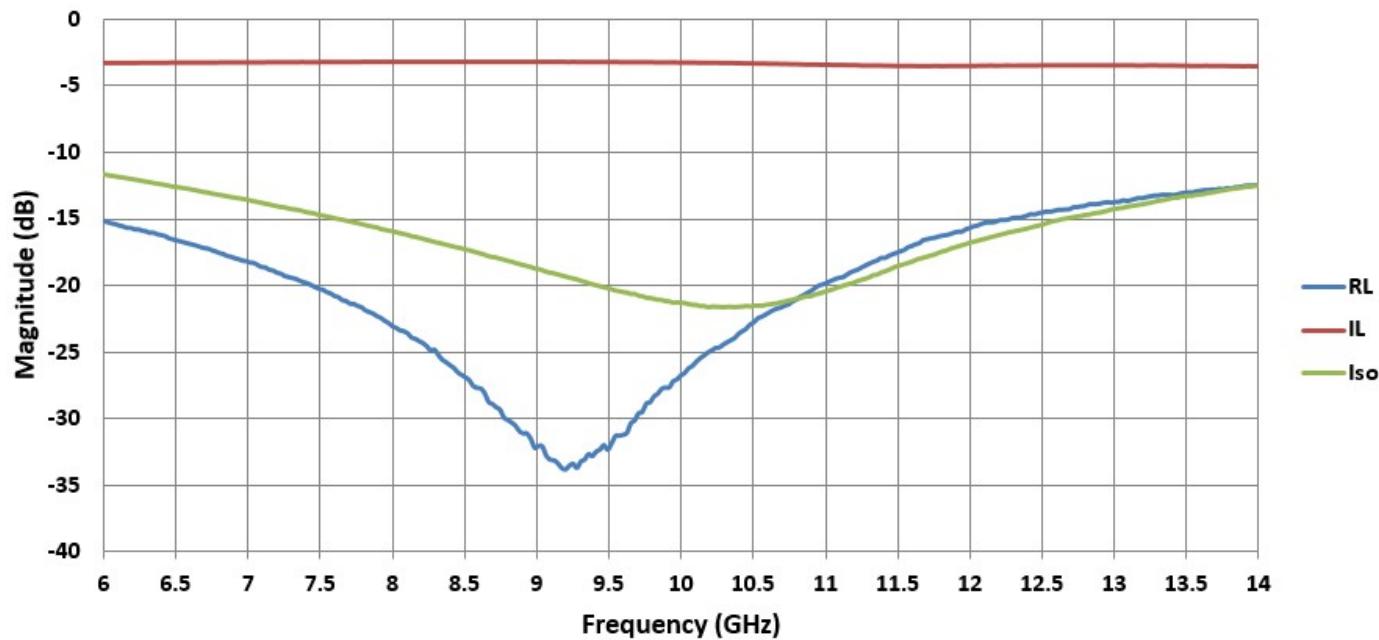

*Typical de-embedded measured performance mounted on a connectorized test fixture. DEB is 0.010 in. RO4350B with 50.0Ohm CPW ground traces going into the ports at room temperature.

2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLLengineering@knowles.com

January 2026


10 GHz 2-way Wilkinson Power Divider

PDW06399

www.knowlescapacitors.com

Physical Dimensions


Units = Inches

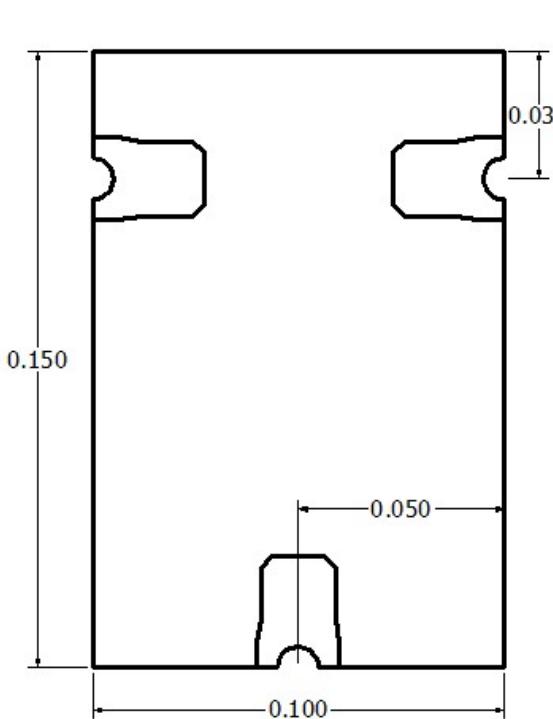

Top



Side

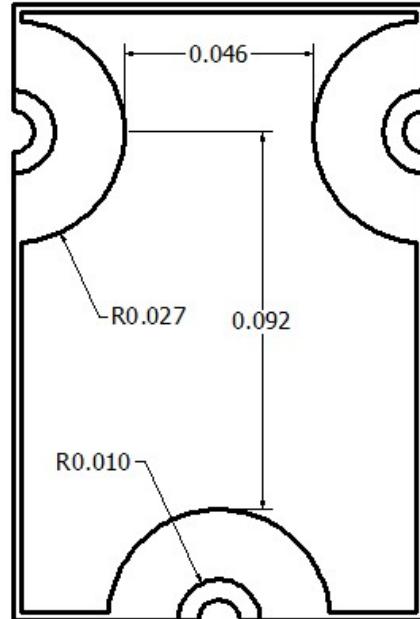

Bottom

Notes :

1. Mounting Surface Metallization:

ENIG: 3 - 6 μ inch Au over 50 μ inch Ni

2. Maximum Assembly Process Temperature: 250°C

Tolerances:

For values with 3 decimal places ± 0.001

For values with 4 decimal places ± 0.0005

2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710


To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLLengineering@knowles.com

10 GHz 2-way Wilkinson Power Divider

PDW06399

www.knowlescapacitors.com

Recommended PCB Layout

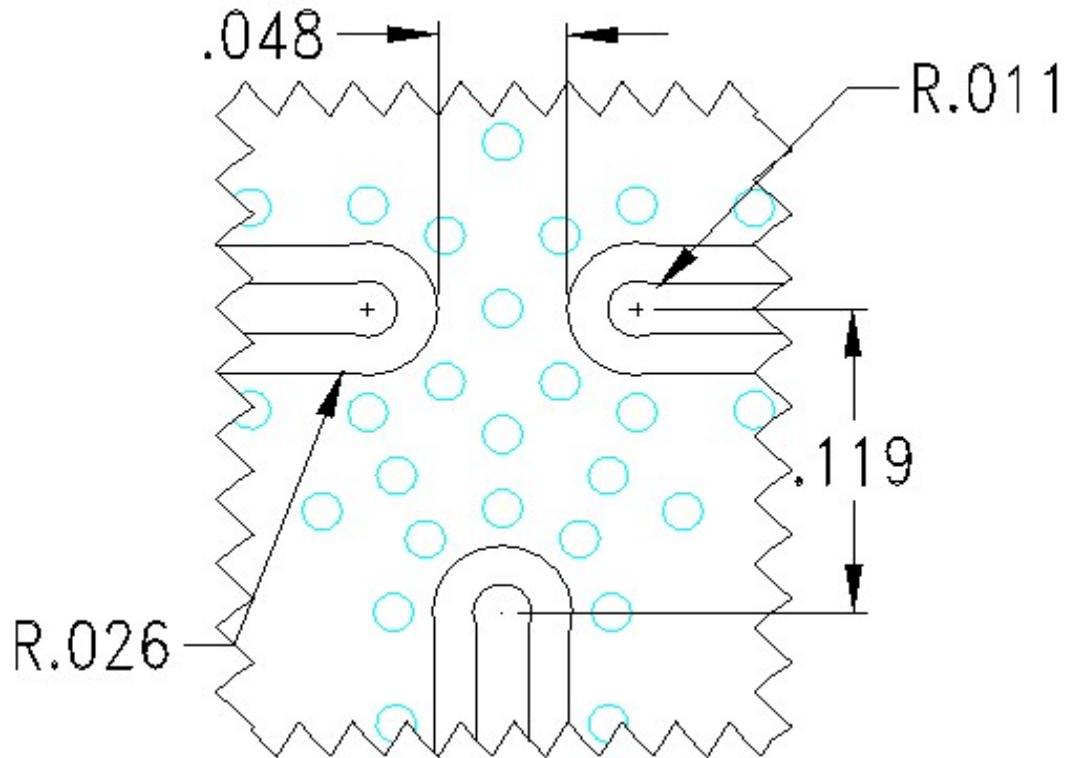

Note :

Units = Inches

- 50Ω trace dimensions are application specific.
- Ensure adequate grounding beneath the part.

For more information on how to mount this SMD part, refer to the SMD Guide, available in the Thin Film section of <https://www.knowlescapacitors.com/Support/Resources>

2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLLengineering@knowles.com

10 GHz 2-way Wilkinson Power Divider


PDW06399

www.knowlescapacitors.com


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

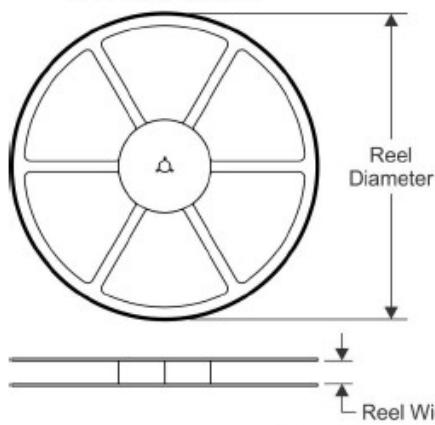


TAPE DIMENSIONS

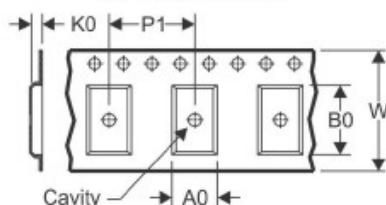

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

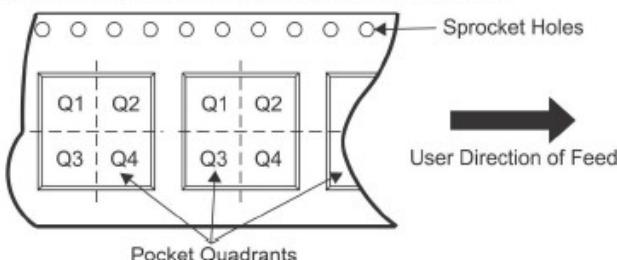

*All dimensions are nominal

Device	Package Type	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
PDW06399-T	SMD	180	12.4	3.0	3.8	0.6	8	12	Q1&2

2777 Route 20 East, Cazenovia, NY 13035 | Ph.: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLLengineering@knowles.com