

8 - 50GHz 2-way Wilkinson Power Divider PDW09692

www.knowlesc capacitors.com

DESCRIPTION

DLI's 8-50 GHz 2-way power divider / combiner offers unmatched size and performance in a surface mount configuration. This power divider utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature.

FEATURES

- Small Size
- Frequency Stable over Temperature
- Solder Surface Mount Package
- Excellent Repeatability
- Moisture Sensitivity Level: MSL1
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

Packaging and Ordering Information:

To request tape and reel packaging, please order part number PDW09692-T, see page 5 for details.

SPECIFICATIONS*

Parameter	Frequency Range (GHz)	Min	Typ.	Max
Nominal Power Splitting (dB)	8 - 50		3	
Nominal Phase Shift (Deg)	8 - 50		0	
Excess Insertion Loss (dB)	8 - 30 30 - 50		0.5 1.5	1 2.5
Return Loss (dB)	8 - 50	12	17	
Amplitude Balance (dB)	8 - 30 30 - 50		0.1 0.4	0.2 0.7
Phase Balance (Deg)	8 - 30 30 - 50		2 8	5 10
Isolation (dB)	8 - 30	15	20	
Max CW Input Power** as Divider (W)	8 - 50			10
Max CW Input Power** as Combiner (W)	8 - 50			5 ***



*Electrical specifications based on typical mounted performance at room temperature. Insertion loss shall vary ± 0.5 dB over temperature.
**Power rating assumes the component will be mounted to a PCB with good thermally conducting ground vias as outlined in the recommended PCB layout that are connected to an adequate heat sink. Max power is based on 85°C base temperature.

***Power rating as a combiner assumes that the incoming signals are of equal amplitude and phase.

Information in this document is for informational and guideline purposes only. All information regarding the Product described in this datasheet is subject to change from time to time at Knowles Precision Devices' sole discretion. It is the customer's sole responsibility to evaluate the suitability of the Product in the customer's particular application. Knowles Precision Devices assumes no responsibility or liability for the use of the information contained within.


2777 Route 20 East, Cazenovia, NY 13035 | Phone: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLIengineering@knowles.com

8 - 50GHz 2-way Wilkinson Power Divider
PDW09692

www.knowlescapacitors.com

Typical Measured Performance

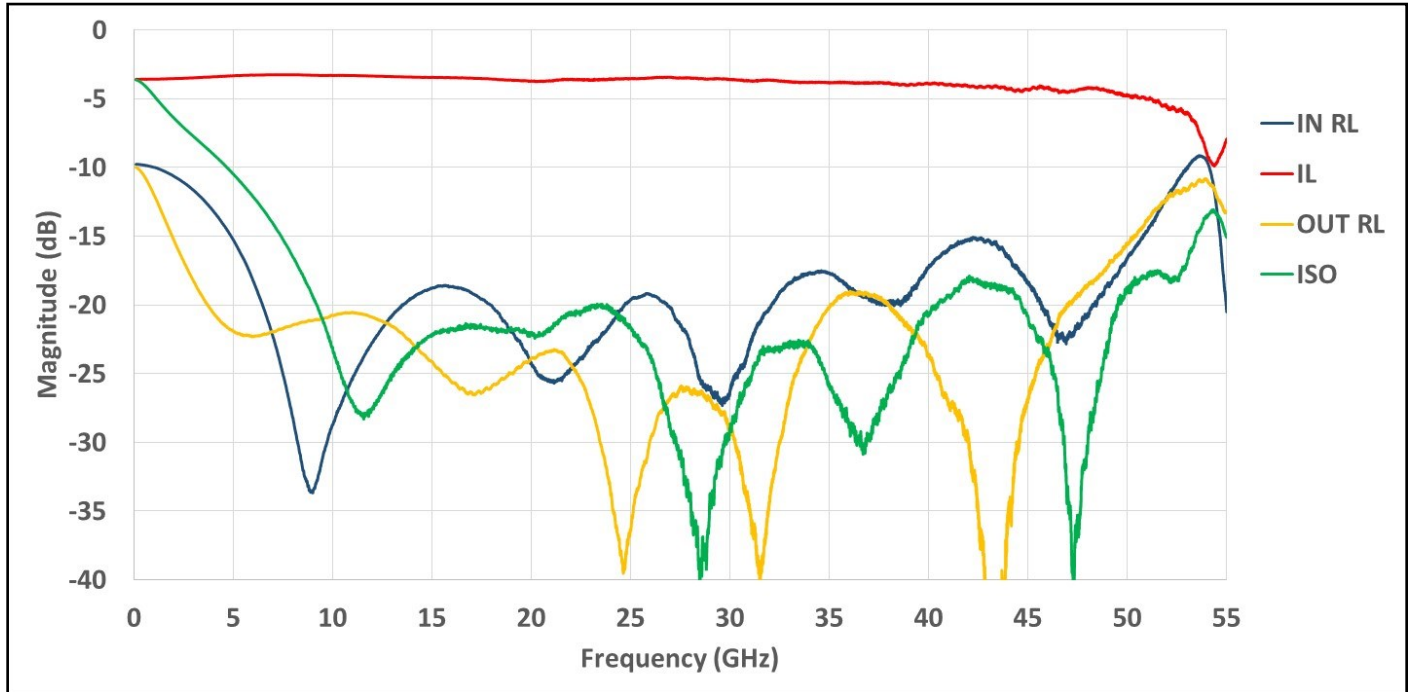

*Typical de-embedded measured performance mounted on a connectorized test fixture. DEB is 0.010 in. RO4350B with 50.0Ohm CPW ground traces going into the ports at room temperature.

2777 Route 20 East, Cazenovia, NY 13035 | Phone: (315)655-8710


To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLengineering@knowles.com

8 - 50GHz 2-way Wilkinson Power Divider
PDW09692A

www.knowlesc capacitors.com

Physical Dimensions

Units = Inches

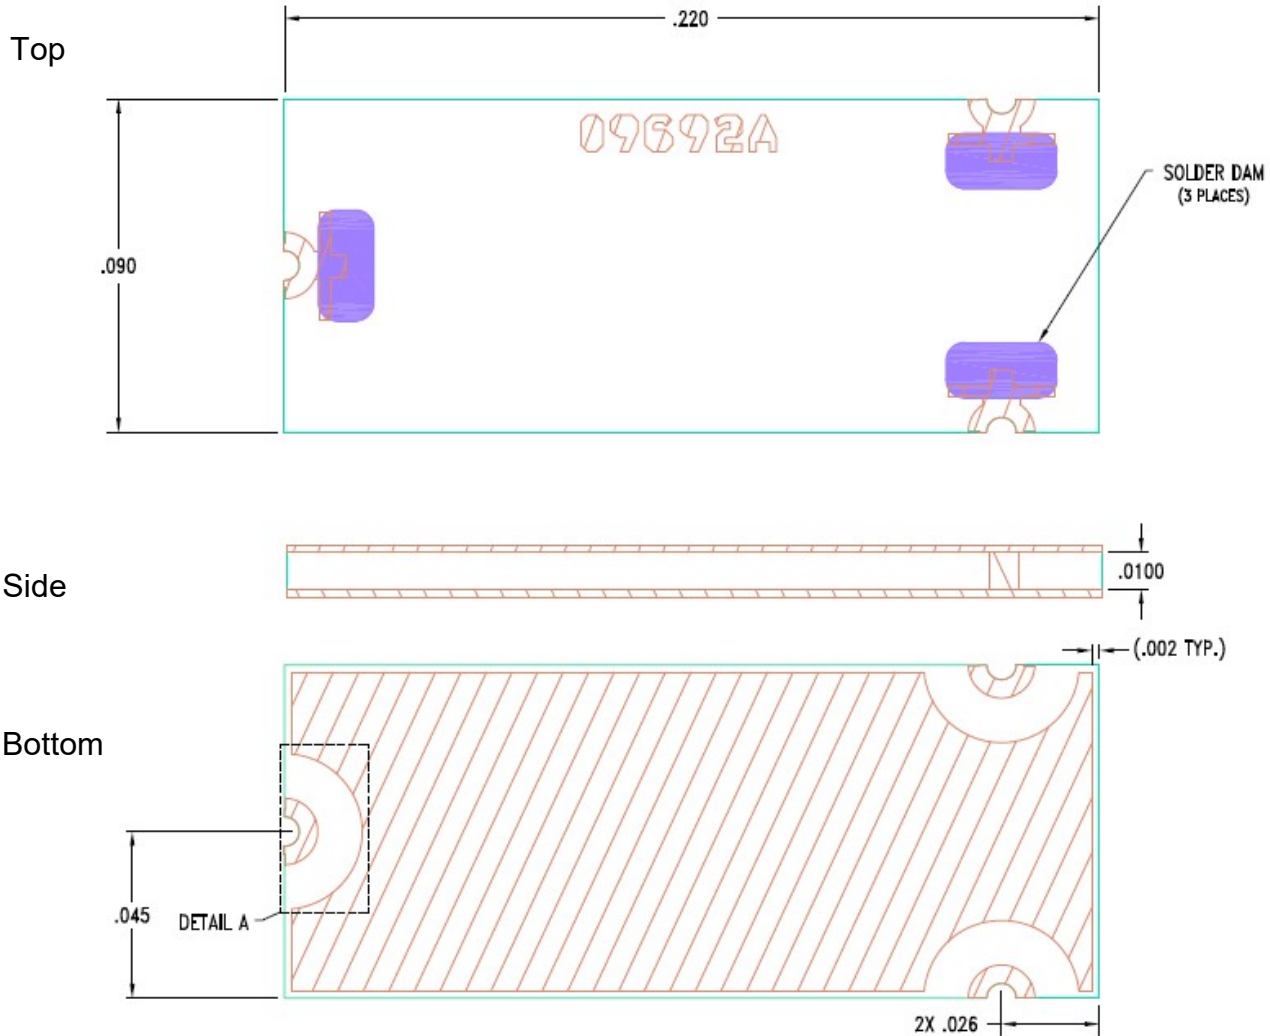

Notes :

1. Termination Finish

ENIG: 3 - 6 μinch Au over 50 μinch Ni


2. Maximum Assembly Process Temperature: 250°C

Tolerances:

For values with 3 decimal places ±0.001

For values with 4 decimal places ±0.0005

DETAIL A
(3 PLACES)

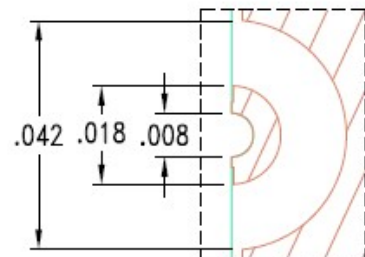


2777 Route 20 East, Cazenovia, NY 13035 | Phone: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLengineering@knowles.com

8 - 50GHz 2-way Wilkinson Power Divider
PDW09692

www.knowlescapacitors.com

Recommended PCB Layout

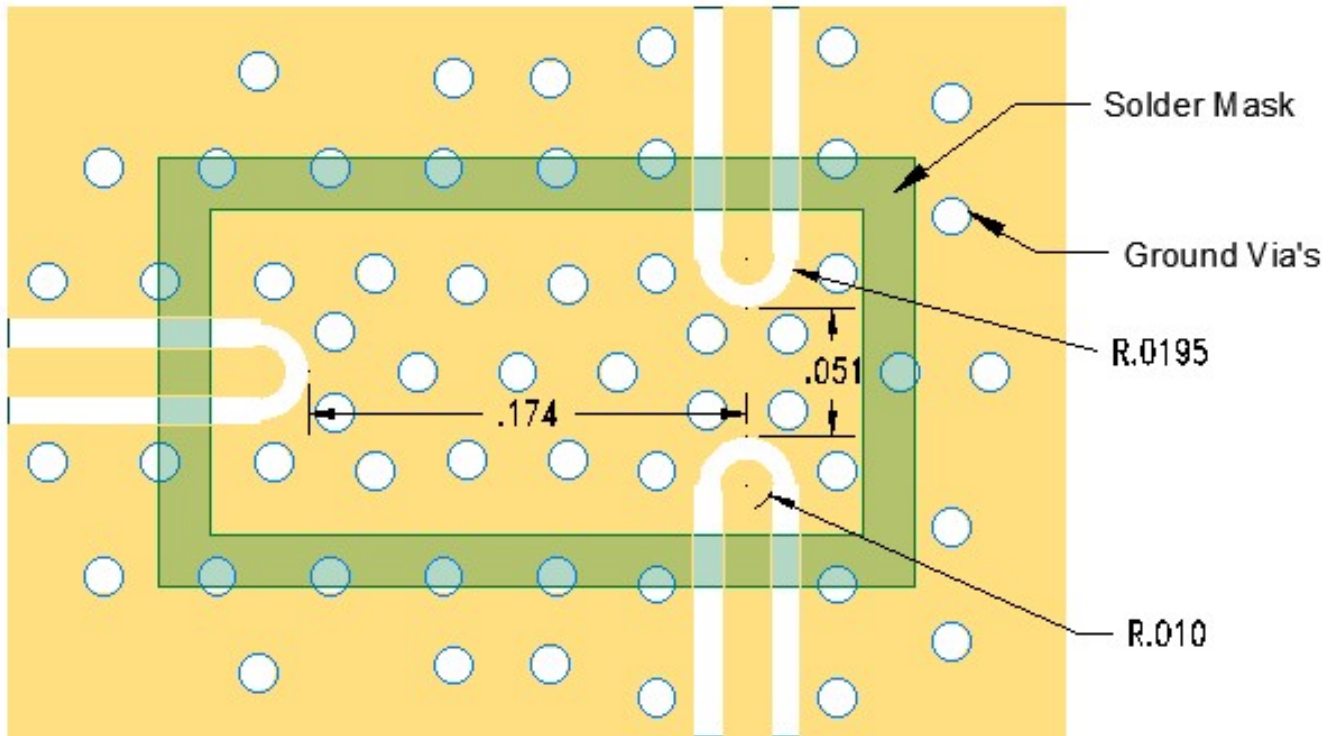

Note :

Units = Inches

Parameters of the Recommended PCB:

- 0.010 inch Rogers Board RO4350B
- 3.66 dK, Board Material design
- Dimensions of 50.0 Ohm CPWG :
 - . 0.020 inch RF trace width
 - . 0.015 inch spacing

For further details and best practices, reference the **Microwave Products Guide**, available at: <https://www.knowlescapacitors.com/Support/Catalogs>

2777 Route 20 East, Cazenovia, NY 13035| Phone: (315)655-8710

To Order Contact KCCSales@knowles.com | For Technical Inquiries Contact DLIengineering@knowles.com